

Onboard Weighing

TABLE OF CONTENTS

PL Series Load Cells..... 782
Rigid Underbody Load Cell Kits 784
Tractor-Trailer Kits..... 785
Loadrunner® 786
Dump Truck Systems Kit
TradeRoute® HL Series 787
Legal for Trade Onboard Weighing System

ONBOARD WEIGHING

Product names, logos, brands and other trademarks featured or referred to within this publication are the property of their respective trademark holders.

PL Series Load Cells

PL9000-14



The PL9000-14 is a low-profile load cell designed for onboard weighing applications with limited height. With a single-piece bearing plate and an overall profile of only 2.4 inches, the PL9000-14 is ideal for applications with four- or six-point under-body mounts and body rest mounts.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price	
Static 16,500 lb	Dynamic 10,000 lb	114322	19 lb	\$810.00

PL9000-14.4



The PL9000-14.4 is ideal for under-body and body rest mounts in four- or six-point system configurations. This load cell offers higher load ratings with a single-piece bearing plate and overall length of 14 inches.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price	
Static 25,000 lb	Dynamic 12,500 lb	115345	18 lb	\$920.00

PL9000-22



The PL9000-22 is designed for underbody mounts and low-profile axle scales such as Rice Lake's AX3040. It has a 2.4-inch profile and is 22.6 inches long.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price	
Static 30,000 lb	Dynamic 20,000 lb	111766	30 lb	\$1,170.00

PL9000-26



The PL9000-26 is a heavy duty, shear beam load cell designed for kingpin plates and underbody mounts. Available with either a single bearing plate or two separate bearing plates, the PL9000-26 has a 2.3 inch profile and is 26 inches long.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price	
Static 40,000 lb	Dynamic 20,000 lb	114325	35 lb	\$1,095.00

PL9000-50



The PL9000-50 is designed for 5th wheel kits and spring suspension equalizer hangers. The PL9000-50 has two separate bearing plates, one on each end, and an overall profile of 2.8 inches.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price	
Static 50,000 lb	Dynamic 12,500 lb	114326	24 lb	\$925.00

PL9110



The PL9110 double-ended shear beam load cell is ideal for weighing equipment typically fixed to a truck body. This low-profile, rigid mount load cell is offered in capacities from 2,000 lb to 20,000 lb with the same profile.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 2,000 lb	204610	6 lb	\$780.00
Static 5,000 lb	204611	6 lb	\$780.00
Static 10,000 lb	204612	6 lb	\$780.00
Static 20,000 lb	204613	6 lb	\$780.00

PL Series Load Cells

PL9200



The PL9200 onboard weighing load cell is hermetically sealed with an IP69 rating.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 25,000 lb	209603	25 lb	\$1,195.00
Static 35,000 lb	210812	25 lb	\$1,195.00

RLD-10K



The RLD-10K double-ended shear beam load cell has a low profile and rigid mount. The RLD-10K is ideal for applications where suspension mounts are not suitable, profile increases don't work, or dynamic forces are present.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 10,000 lb	120959	6 lb	\$1,260.00

PLSB-25K



The PLSB-25K is used in Rice Lake's twist-lock and stacking cone mount assemblies. This rigid mount, double-ended shear beam load cell is used when a series of mounts are not fixed to a frame at all times. The PLSB-25K can also be used in applications with dynamic forces.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 25,000 lb	179827	26 lb	\$1,550.00
Static 25,000 lb	191898	26 lb	\$1,620.00

PLSB-40K



The PLSB-40K alloy steel load cell is hermetically sealed with an IP68 rating and has a 0.75 mV/V output at 12,500 lb.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 40,000 lbs	117666	31 lb	\$1,075.00

LOAD PIN - 2 INCH, 20K



This 2-inch load pin is used in Rice Lake's Loadrunner kits and semi trailer landing gear. This load pin can be paired with load and support collars for applications that have pivot or rotation requirements.

Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 20,000 lb	181895	10 lb	\$1,050.00

Additional details and complete specifications for onboard weighing load cells can be found online. Please consult the factory to determine the best model for your application.

ONBOARD WEIGHING

Rigid Underbody Load Cell Kits




Rice Lake Weighing Systems' rigid underbody load cell kits are designed to offer an onboard weighing solution for a variety of truck body types. They are mounted between the truck chassis and the body, needing little clearance to record weight information. These kits are common for straight truck applications with tanks and hoppers. Contact one of our product specialists to find a solution for your equipment.

Part Number/Price

Part #	Model #	Description	Price
114307	PL9710-414.4	Four-point indicator kit with 14.4 in load cells (50,000 lb max with dead load) Kit includes: 9710, four-lead transmitter, (4) 14.4 in load cell, (4) bearing plates, (4) body coil springs, 35 ft truck cable, 15 ft power cable	\$6,800.00
114308	PL9710-614.4	Six-point indicator kit with 14.4 in load cells (75,000 lb max with dead load) Kit includes: 9710, six-lead transmitter, (6) 14.4 in load cell, (6) bearing plates, (8) body coil springs, anti rotation plate, 35 ft truck cable, 15 ft power cable	\$8,820.00


ONBOARD WEIGHING

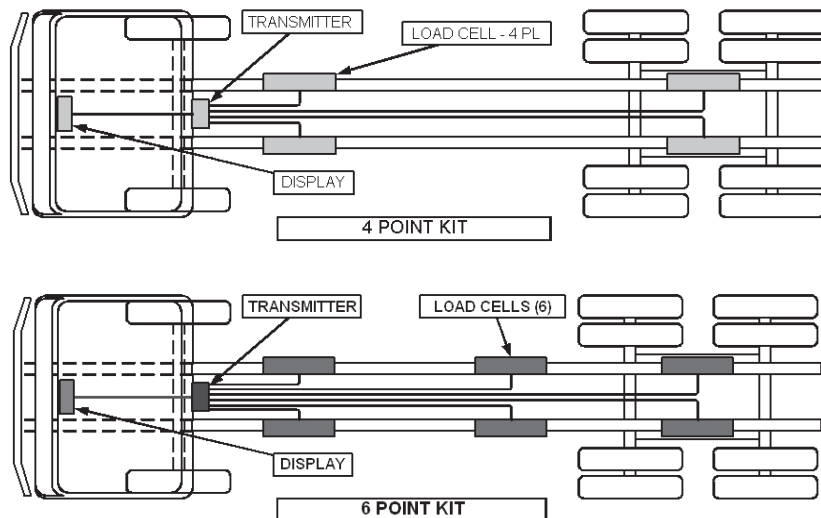

9700 Series Indicator, PN 114186



PL9000-14.4 Load Cell, PN 115345

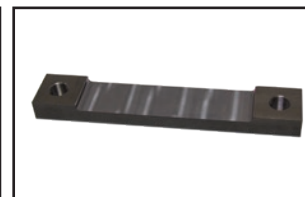

Bearing Plate, PN 115309



Transmitter, PN 114190



Cable Assembly, PN 114199



Power Cable, PN 115093


Tractor-Trailer Kits



Rice Lake Weighing Systems offers an array of onboard scale systems for over-the-road tractor-trailer. Whether you are adding air pressure or load cell sensing, many combinations are available to fit your needs. Talk with one of our product specialists to find an onboard weighing solution for your tractor-trailer.

Part Number/Price

Part #	Model #	Description	Price
Air Ride Kit, Tractor/Trailer			
114286	PL9700-200	Dual transducer kit (tractor-trailer) Kit includes: 9700, (2) air transmitter 2-lead, (2) dual air pressure transducer, 35 ft & 80 ft truck cable, 15 ft power cable	\$3,880.00
Fifthwheel Kit w/Air Ride Trailer Kit			
114295	PL9701-250H	Holland fixed 5th wheel kit (25,000 lb max with dead load) Kit includes: 9700, dual lead transmitter, (2) 5th wheel bending beam/suspension load cell, 35 ft truck cable, 15 ft power cable, hardware	\$4,620.00
114294	PL9701-200	Dual transducer kit (trailer only) Kit includes: Air transmitter 2-lead LC, dual air pressure transducer, 80 ft truck cable	\$1,360.00

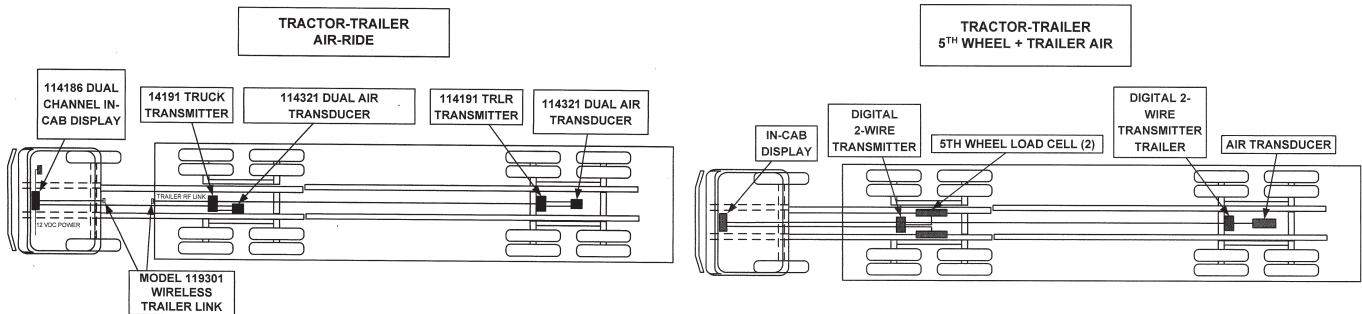

ONBOARD WEIGHING



9700 Series Indicator, PN 114186



Air Pressure Transducer, PN 114321



Transmitter, PN 114191




Cable Assembly, PN 114199



Trailer Cable, PN 114201



Power Cable, PN 115093



PL9000-50 Load Cell, PN 114326



Trunnion, Holland, PN 115104

Loadrunner®

Dump Truck Systems Kit




Rice Lake Weighing Systems' onboard scale systems assure optimal and safe use of a truck's payload capacity. The Loadrunner dump truck system incorporates both load cell and hydraulic pressure sensing. Weight information is obtained when the dump body is lifted a few inches off the frame. Speak with one of our product specialists to learn more about how Loadrunner can benefit your fleet operations.

Part Number/Price

Part #	Description	Price
158195	Dump truck system with 2-inch load pins, indicator, cables and hardware	\$5,200.00

ONBOARD WEIGHING

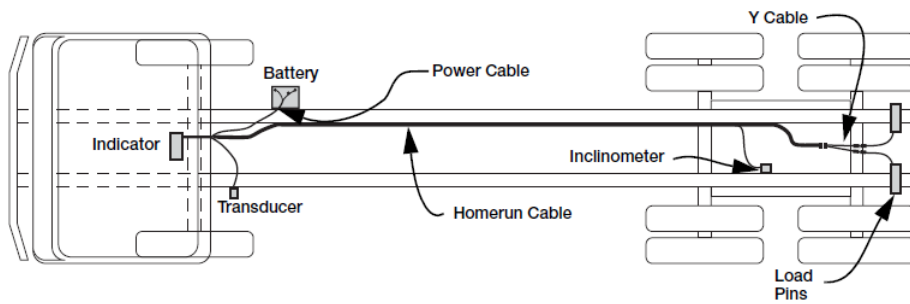

OB-350 Indicator, PN 131219




Hydraulic Transducer, PN 131211



Dump Truck Load Pin, PN 181895



Onboard Inclinometer, PN 131222



Dump Truck Hardware Kit



Power Cable, PN 131221



Y-Splitter Cable, PN 131226



Homerun Cable, PN 131228

Compatibility note: The Loadrunner dump truck kit has been designed for use on dual pin hinge pivot type dump bodies only. For dump truck body rear pivot assemblies using a single hinge bar, contact Rice Lake.

TradeRoute® HL Series

Legal for Trade Onboard Weighing System



Double-double Assembly

Approvals



Measurement
Canada
Approved



Single Assembly



Double Assembly

Standard Features

Legal for Trade Onboard System Includes

- 3 or 4 point onboard system RL20000 load cell with 20 ft cable, IP67
- 80-foot conduit cable
- Magnetic transport alarm sensor with 15 ft cable
- JB4SS junction box
- Hydraulic line locks and hoses
- 920i® Onboard Weigh Center
- Hydraulic pump not included
- Minimum 3,000 PSI recommended to maintain 2,200 PSI during lift

920i Onboard Weigh Center

- Epson® TM-U295 printer with splash shield
- Pre-installed 30 ft power cable, 30 ft load cell cable and inclinometer
- Transport alarm LEDs
- Power switch
- Start/End switch
- Waterproof enclosure
- Vibration mounts
- Mounting bracket to body not included

920i USB Universal with Onboard Software

- RS-232 port for connecting to ticket printer
- Standard onboard software
- USB interface board only

USB Interface Functions

- Available upon special request using a Type A sealed connection
- USB interface card on Port 2
- Supports weigh mode and configuration mode functions
- Supports upload of databases and 920i configuration file
- Supports download of databases, 920i configuration file, iRite®, COD file and firmware file
- Sanity checks for command errors
- Create STD database files

Flash Drives

- Supports USB 2.0 (optional)
- Create subdirectories by unit ID and database name
- Use the root directory for generic files

Specifications

Capacity:

Up to 60,000 lb (30,000 kg)

Load Cell:

Rice Lake RL20000I alloy steel
S-Beam, 20 ft cable

Junction Box:

JB4SS TuffSeal®

Rating/Material:

NEMA Type 4X
Stainless steel enclosure

Power Input:

9 to 36 VDC

Weigh Center:

920i® series weight controller
Epson® TM-U295

Approvals:

NTEP CC 15-102 Class III/IIIL
Measurement Canada AM-4847

ONBOARD WEIGHING

TradeRoute® HL Series

Legal for Trade Onboard Weighing System

Part Number/Price

Part #	Model #	Description	Price
TradeRoute Package (Includes 920i Weigh Center)			
131098	AN15L-3	15,000 lb × 5 lb/8,000 kg × 2 kg 3-point system, OB5-SGL5 / OB10-DBL5 modules	\$14,900.00
131099	AN20L-4	20,000 lb × 5 lb/10,000 kg × 2 kg 4-point system, OB10-DBL5 (x2) modules	\$18,200.00
131100	AN30L-3	30,000 lb × 10 lb/15,000 kg × 5 kg 3-point system, OB10-SGL10 / OB20-DBL10 modules	\$16,300.00
131101	AN40L-4	40,000 lb × 10 lb/20,000 kg × 5 kg 4-point system, OB20-DBL10 (x2) modules	\$18,200.00
131103	AN60L-4	60,000 lb × 10 lb/30,000 kg × 5 kg 4-point system, OB30-DBL15 (x2) modules	\$20,400.00
TradeRoute Package (Includes In-cab 920i, Alarm and Inclinator)			
221327	AN15L-3	15,000 lb × 5 lb/8,000 kg × 2 kg 3-point system, OB5-SGL5 / OB10-DBL5 modules	\$14,400.00
221328	AN20L-4	20,000 lb × 5 lb/10,000 kg × 2 kg 4-point system, OB10-DBL5 (x2) modules	\$17,700.00
221329	AN30L-3	30,000 lb × 10 lb/15,000 kg × 5 kg 3-point system, OB10-SGL10 / OB20-DBL10 modules	\$15,800.00
214818	AN40L-4	40,000 lb × 10 lb/20,000 kg × 5 kg 4-point system, OB20-DBL10 (x2) modules	\$17,700.00
219104	AN60L-4	60,000 lb × 10 lb/30,000 kg × 5 kg 4-point system, OB30-DBL15 (x2) modules	\$18,900.00
System Components			
131442	–	920i® Weigh Center package includes: Indicator, Epson® Ticket Printer, 25ft load cell cable, power cable, housing, vibration mounts for installation to customer supplied mounting bracket	\$5,350.00
154109	–	In-cab indicator 920i (requires 154112, 154111 and printer)	\$4,150.00
154112	–	In-cab LED alarm assembly, 8 ft cable	\$130.00
154111	–	Inclinometer, junction box assembly, 35 ft cable	\$750.00
65635	–	Epson TM-U295 printer	\$630.00
131811	–	Optional LED cab alarm, 35 ft	\$150.00
15494	EL146HE	Four conductor hostile environment load cell cable	\$1.96/ft
88956	JB4SS	JB4SS signal trim j-box with PG37 cord grips	\$275.00
128123	–	Conduit, 1/2 in non metallic liquid tight polytuf®	\$12.00/ft
128670	OB5-SGL5	Low profile 5,000 lb single assembly	\$4,870.00
128666	OB10-DLB5	Low profile 10,000 lb double assembly	\$6,140.00
127956	OB10-SGL10	Low profile 10,000 lb single assembly	\$4,870.00
127958	OB20-DBL10	Low profile 20,000 lb double assembly	\$6,140.00
127959	OB30-DBL15	Low profile 30,000 lb double assembly	\$8,520.00
155300	OB30-TAN15	Low profile 30,000 lb single tandem assembly	\$10,320.00

Note: Connect to your existing hydraulic pump with a maximum pressure of 3,000 PSI with a minimum flow of 5 GPM for best performance of lifting speed.

Note: Contact factory for other capacities not shown.

ONBOARD WEIGHING