



Picture is a representation of actual product.

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
7 kg	<b>36185</b>	2 lb	Consult
10 kg	<b>36186</b>	2 lb	Consult
15 kg	<b>36187</b>	2 lb	Consult
30 kg	<b>36188</b>	2 lb	Consult
60 kg	<b>36189</b>	2 lb	Consult
100 kg	<b>68551</b>	2 lb	Consult
150 kg	<b>69345</b>	2 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E	F	G
kg/mm							
7 to 15	30.2	139.7	19.1	6.4	88.9	1/4-20 UNC	19.1
30 to 60	30.2	139.7	19.1	6.4	88.9	1/4-20 UNC	23.9
100 to 150	30.2	139.7	22.3	7.8	79.2	3/8-16 UNC	30.7

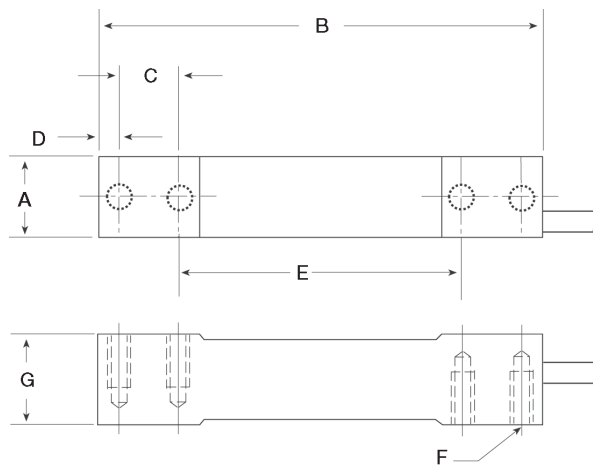

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS  
**RL1380**.....page 166

**Specifications**

**Full Scale Output:**

2.0 mV/V

**Output Resistance:**

359 (± 10) ohm

**Input Resistance:**

390 (± 15) ohm

**Material/Finish:**

Stainless steel

**Temperature:**

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**

Environmentally sealed, IP67

**Safe Overload:**

150% full scale

**Rated Excitation:**

5 to 10 VDC (15 V maximum)

**Combined Error:**

0.03% full scale

**Insulation Resistance:**

5,000 megohm

**Deflection at Capacity:**

< 0.4 mm full scale

**Cable Length:**

10 ft

**Cable Diameter:**

0.190 in

Polyurethane jacket

**Cable Color Code:**

Green +Excitation

Black -Excitation

White +Signal

Red -Signal

Yellow Shield

**Warranty:**

One-year limited

**Approvals:**

FM

NTEP

OIML

