



Picture is a representation of actual product.

Approvals



Order Information


Load Rating	Part #	Est. Weight	Price
NTEP Certified/OIML			
5 kN	26662	4 lb	Consult
10 kN	26663	4 lb	Consult
23 kN	26664	4 lb	Consult
50 kN	26665	7 lb	Consult
Non-NTEP Certified/Non-OIML			
5 kN	17390	4 lb	Consult
10 kN	17391	4 lb	Consult
23 kN	17392	4 lb	Consult
50 kN	17393	7 lb	Consult
100 kN	17394	17 lb	Consult
Options			
Conduit adapter, 1/2-14 NPT	17703	1 lb	Consult

30 ft Cables

Load Rating	Part #	Est. Weight	Price
NTEP Certified/OIML			
5 kN	100164	4 lb	Consult
10 kN	100165	4 lb	Consult
23 kN	100166	4 lb	Consult
50 kN	100167	7 lb	Consult
Non-NTEP Certified/Non-OIML			
5 kN	100169	4 lb	Consult
10 kN	100170	4 lb	Consult
23 kN	100171	4 lb	Consult
50 kN	100173	7 lb	Consult
100 kN	100168	17 lb	Consult

Dimensions

Rated Capacity kN/in	C	C1	H	H1	H2	H3	H5	L	L1	L2	L3	L4	W
5 to 23	0.53	0.71	1.42	0.39	0.59	1.19	0.16	6.10	0.59	1.38	3.15	2.98	1.18
50	0.85	0.98	1.93	0.58	0.81	1.62	0.31	7.48	0.83	1.57	4.13	3.66	1.69
100	1.06	1.18	2.87	0.82	1.21	2.43	—	9.65	1.19	1.97	5.31	4.72	2.36

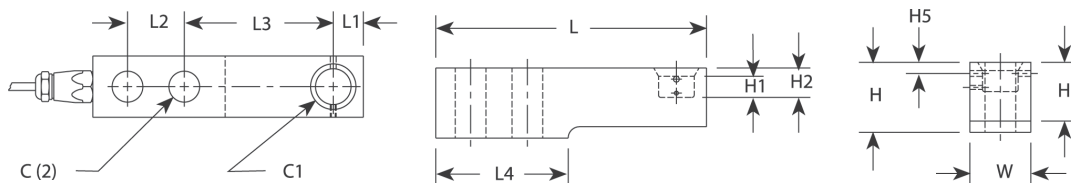

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
Paramounts® HE..... page 36
- RICE LAKE WEIGHING SYSTEMS
Paramounts® HS..... page 49

Specifications

- Full Scale Output:**
2.0 mV/V
mV/V/ohm calibration
- Output Resistance:**
1,000 (± 2) ohm
- Input Resistance:**
1,100 (± 50) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated:
14 °F to 104 °F (-10 °C to 40 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Hermetically sealed, IP69K
- Safe Overload:**
200% full scale
- Safe Sideload:**
100% full scale
- Rated Excitation:**
5 to 15 VDC
- Combined Error:**
± 0.03% full scale
- Insulation Resistance:**
10,000 megohm
- Deflection at Capacity:**
10 kN: 0.012 in
23 kN: 0.02 in
50 kN: 0.012 in
100 kN: 0.016 in
- Cable Length:**
5 to 23 kN: 10 ft
50 to 100 kN: 15 ft
Also available in 30 ft
- Cable Diameter:**
0.196 in
Polyurethane jacket
- Cable Color Code:**
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield
- Warranty:**
One-year limited
- Approvals:**
FM
NTEP
OIML

FLINTEC®