

# BenchMark® CW-80B

Light-capacity Bench Scale

BENCH SCALES



## Standard Features

- NTEP Certified, IP67 stainless steel load cell
- 304 stainless steel construction
- LifeGuard™ base design isolates load cell from overloads and shock loads for added durability
- Specially designed adjustable support feet provide exceptional traction and won't scratch surfaces

## Specifications

**Load Cell, NTEP Certified:**  
IP67 stainless steel and environmentally sealed

**Output Impedance:**  
350 ohm

**Maximum Overload:**  
200%

**Overload Protection:**  
Shock-absorbing spider

**Scale Frame:**  
AISI304L, straight line finish, Ra=45 ± 10

**Scale Cover:**  
AISI304L, straight line finish, Ra=45 ± 10

**Cable Length:**  
10 ft (3 m)

**Temperature:**  
Compensated:  
14 °F to 104 °F (-10 °C to 40 °C)

**Warranty:**  
Two-year limited

**Approvals:**  
NTEP 96-107, Class III, 3000 d  
Measurement Canada AM-5156  
Load cell is FM approved

## Approvals



Measurement  
Canada  
Approved



## Part Number/Price

Part #	Platform Capacity	Dimensions (L × W × H)	Est. Weight	Price
35075	6 lb (3 kg)	10 × 10 × 3.15 in	13 lb	Consult
35076	10 lb (5 kg)	10 × 10 × 3.15 in	13 lb	Consult
35077	15 lb (7 kg)	10 × 10 × 3.15 in	13 lb	Consult
35078	30 lb (15 kg)	10 × 10 × 3.15 in	13 lb	Consult
35079	30 lb (15 kg)	12 × 12 × 3.25 in	14 lb	Consult
35080	60 lb (30 kg)	12 × 12 × 3.25 in	14 lb	Consult


## Options/Accessories

Part #	Description	Catalog Page #
Consult	Scale columns	See page 208
Consult	Ball transfer and roller conveyor scale tops	See page 207
Consult	Mobile scale carts	See page 203 to page 206

## Dimensions

CW-80B			
10 × 10 in			
H	3.15 in	W	10.00 in
L	10.00 in	W1	10.25 in
L1	10.25 in		

Note: 1 in = 25.4 mm

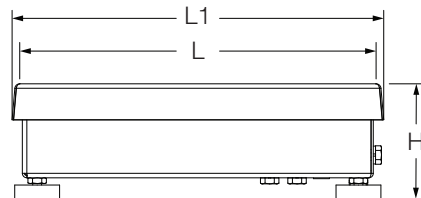

12 × 12 in			
H	3.25 in	W	12.00 in
L	12.00 in	W1	12.25 in
L1	12.25 in		

Note: 1 in = 25.4 mm

