



Standard Features

- Four adjustable feet, level indicator on LCE and NCE
- Midrics 1 display for simple weighing tasks
- Optional accessories: User-installed interface kits, printer, external battery pack, software tools, panel mount kit

Specifications

Indicators:

MIS1 - UR 20 mm LCD

Power Supply:

100 to 200 VAC, 50/60 Hz

Readability:

15,000 scale intervals

Cable Length:

2.5 m (8.2 ft)

IP Rating:

IP65

Warranty:

Two-year limited, pending evaluation

PRECISION
INDUSTRIAL WEIGHING


Part Number/Price

Part #	Minebea Part #	Dimensions	# Load Cells	Capacity	Readability	Est. Weight	Price
103668	MW1P1U-6DC-L	12.5 × 9.5 in	1	6 kg	0.5 g	22 lb	Consult
103669	MW1P1U-15DC-L	12.5 × 9.5 in	1	15 kg	1 g	24 lb	Consult
103670	MW1P1U-30ED-L	15.75 × 11.8 in	1	30 kg	2 g	24 lb	Consult
103671	MW1P1U-60ED-L	15.75 × 11.8 in	1	60 kg	5 g	24 lb	Consult
103672	MW1P1U-60FE-L	19.5 × 15.75 in	1	60 kg	5 g	22 lb	Consult

Options/Accessories

Part #	Minebea Part #	Description	Price
171727	YDH12CWSUS	Holder base mount for ED base	Consult
Consult	Consult	Stainless steel column	Consult
105607	YDH02CISUS	Wall-mount bracket, SST, tiltable	Consult
193048	YDC01SW	Indicator dust cover pack of two	Consult
Consult	YBP03CIS	Base for installing floor mounted option, SST	Consult
Consult	YAS03MI	Indicator panel mount option	Consult

Custom Part No. Configuration

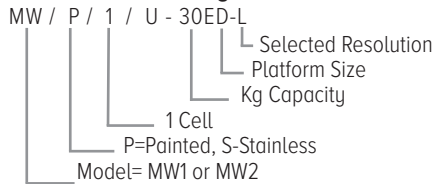

Capacities

- 6 kg × 0.5 g
- 15 kg × 1 g
- 30 kg × 2 g
- 60 kg × 5 g

Platform Sizes

- DC = 12.5 × 9.5 in
- ED = 15.75 × 11.8 in
- FE = 19.5 × 15.75 in