


Polyurethane Rubber Leveling Feet

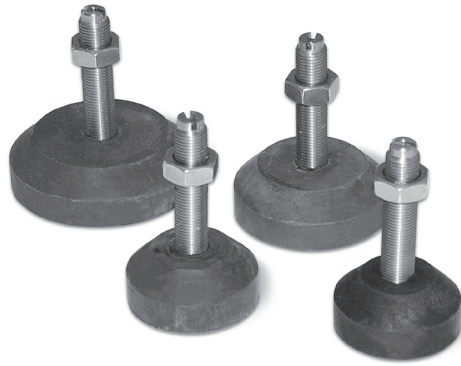

Standard Features

- 3 in overall height, all diameters
- Stainless steel stem for corrosion resistance
- Heavy-duty construction, low-cost replacement feet
- Four standard diameters all with 1/2-20 UNF stainless steel stud, slotted for top-access applications
- Stainless steel jam nut provided
- Top of stud is machined undersize 10% for easy alignment into load cell

Part Number/Price

Part #	Foot Diameter	Height	Price
74585	1.87 in	3.00 in	Consult
74586	2.00 in	3.00 in	Consult
74587	2.50 in	3.00 in	Consult
73801	3.00 in	3.00 in	Consult

Captured Ball Floor Scale Leveling Feet



Carbon

Stainless Steel

Standard Features

Carbon steel

- Bright zinc and clear chromate plating for corrosion resistance
- Active ball suspension provides ideal load cell loading with maximum side load protection
- Hardened alloy steel with plated finish
- Includes one jam nut in carbon steel and stainless steel feet
- Top of stud is machined undersized 10% for easy alignment into load cell plus slotted for top-access applications

Stainless steel

- Provides outstanding accuracy, repeatability and performance
- Active ball suspension provides optimal load cell performance
- Hardened stainless steel material, welded with polished finish
- Includes one jam nut in carbon steel and stainless steel feet
- Top of stud is machined undersized 10% for easy alignment into load cell plus slotted for top-access applications

Part Number/Price

Part #	Foot Diameter	Thread Size Inches	Height	Price
Carbon Steel				
74578	1.87 in	1/2-20 UNF	3.50 in	Consult
74579	2.00 in	1/2-20 UNF	3.50 in	Consult
74580	2.50 in	1/2-20 UNF	3.50 in	Consult
74581	3.00 in	1/2-20 UNF	3.50 in	Consult
74582	3.00 in	3/4-16 UNF	4.50 in	Consult
74583	3.00 in	1-12 UNF	4.50 in	Consult
74584	3.00 in	1-14 UNF	4.50 in	Consult
171449	3.00 in	1-14 UNF	5.00 in	Consult
173018	4.40 in	3/4-16 UNF	3.13 in	Consult
174937	5.40 in	3/4-16 UNF	4.13 in	Consult
Stainless Steel				
74572	1.87 in	1/2-20 UNF	3.50 in	Consult
74573	2.00 in	1/2-20 UNF	3.50 in	Consult
73800	2.50 in	1/2-20 UNF	3.50 in	Consult
74574	3.00 in	1/2-20 UNF	3.50 in	Consult
74575	3.00 in	3/4-16 UNF	4.50 in	Consult
74576	3.00 in	1-12 UNF	4.50 in	Consult
74577	3.00 in	1-14 UNF	4.50 in	Consult
92380*	2.50 in	1/2-20 UNF	3.50 in	Consult
175615	3.47 in	1/2-20NF	2.62 in	Consult

*Stem is fully threaded