

# DIGITAL BABY SCALE

## SUSPENDED INFANT SCALE

The OS-10/OS-25/OS-45 suspended infant scale is a portable device for the safe, accurate weighing of infants and toddlers up to 99 pounds (45 kilograms). Designed for use in any health environment, the OS-10/OS-25/OS-45 suspended infant scale is easily transported and powered by two AA batteries. Conveniently lift the infant using the sturdy steel s-hook attached to the optional canvas trousers. This pediatric scale is versatile in its applications, and the innovative weighing technique captures vital information safely and accurately.

## **FEATURES**

- Hold function
- Units of measure lb/lb, oz/kg
- Adjustable automatic shut-off
- Ergonomic handheld design
- Battery operated, two AA batteries (included)
- Carrying case and top s-hook (included)
- Captured lower hook, removable upper hook (both hooks included)

## **SPECIFICATIONS**

#### Capacity:

#### OS-10:

 $22 \text{ lb} \times 0.02 \text{ lb}$ 

 $22 \text{ lb} \times 0.25 \text{ oz}$ 

 $10 \text{ kg} \times 0.01 \text{ kg}$ 

#### OS-25:

 $55 \text{ lb} \times 0.05 \text{ lb}$ 

 $55 \text{ lb} \times 0.5 \text{ oz}$ 

 $25 \text{ kg} \times 0.02 \text{ kg}$ 

#### OS-45:

99 lb  $\times$  0.1 lb

99 lb  $\times$  1 oz

 $45 \text{ kg} \times 0.05 \text{ kg}$ 

#### Power:

Two AA batteries (included)

### **Operating Temperature:**

32 °F to 104 °F (0 °C to 40 °C)


#### Warranty:

One-year limited

#### Approvals:

CE Approved



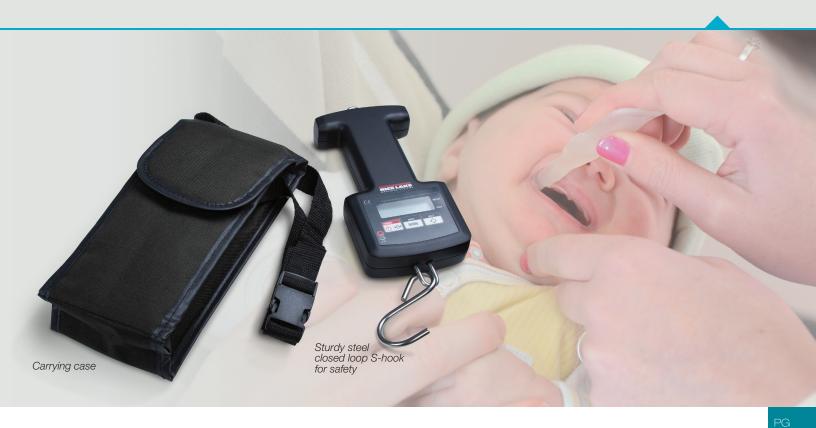

# SUSPENDED INFANT SCALE

MODEL	CAPACITY	PART#
OS-10	$22 \times 0.02$ lb (22 lb × 0.25 oz) (10 × 0.01 kg)	130292
OS-25	$55 \times 0.05$ lb (22 lb × 0.5 oz) (25 × 0.02 kg)	130293
OS-45	99 × 0.1 lb (22 lb × 1 oz) (45 × 0.05 kg)	130294

# **OPTIONS**

DESCRIPTION	PART #
Suspended pediatric sling seat trousers	141444

## SHIPPING WEIGHT

1	MODEL#	PART #	L (IN)	W (IN)	H (IN)	PACKAGE WGT. (LB)	DIM WGT. (LB)	SHIPPING WGT. (LB)
(	OS-10	130292	10	5	3	2	2	2
(	OS-25	130293	10	5	3	2	2	2
(	OS-45	130294	10	5	3	2	2	2

# DIMENSIONS

	INCHES	CENTIMETERS		INCHES	CENTIMETERS
A	14.30	36.3	C	1.30	3.3
В	3.60	9.1	D	11.60	29.5







