



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
<b>NTEP Certified</b>			
7 kg	72764	2 lb	Consult
15 kg	72767	2 lb	Consult
20 kg	72769	2 lb	Consult
30 kg	72771	2 lb	Consult
50 kg	72776	2 lb	Consult
75 kg	72777	2 lb	Consult
100 kg	72778	2 lb	Consult
<b>OIML with Metric Threads</b>			
3 kg	121396	2 lb	Consult
5 kg	121397	2 lb	Consult
7 kg	121398	2 lb	Consult
10 kg	121399	2 lb	Consult
15 kg	121400	2 lb	Consult
20 kg	121401	2 lb	Consult
30 kg	121402	2 lb	Consult
50 kg	121403	2 lb	Consult
75 kg	124835	2 lb	Consult
100 kg	121404	2 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I
kg/mm									
3 to 100	150.3	25.4	39.9	19.1	19.1	19.1	33.8	99.6	11.4

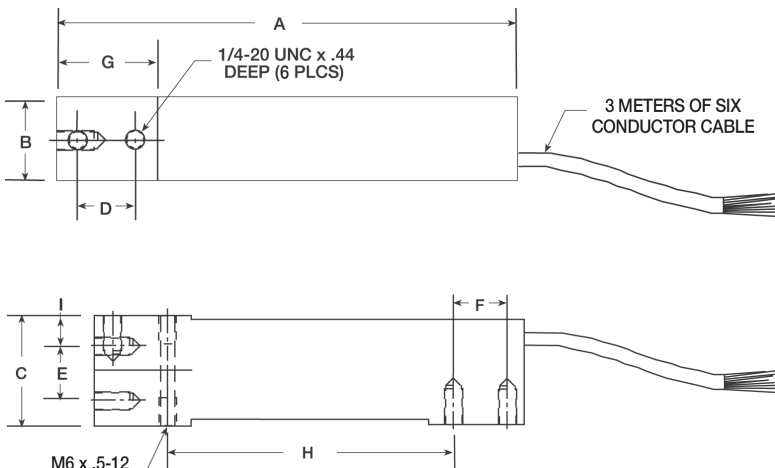

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS  
**RLSP4\***.....page 160
- RICE LAKE WEIGHING SYSTEMS  
**RL1042**.....page 163
- VPG® TEDEA-HUNTLEIGH®  
**1042**.....page 313

\*Color code is different

Specifications

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
350 ohm
- Material/Finish:**  
Anodized aluminum
- Temperature:**  
Compensated:  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating:  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 15 VDC
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
5,000 megohm
- Deflection at Capacity:**  
0.015 in
- Cable Length:**  
3 m (9.8 ft)
- Cable Diameter:**  
0.190 in PVC jacket
- Cable Color Code:**  
Blue +Excitation  
Black -Excitation  
White +Signal  
Red -Signal  
Green +Sense  
Grey -Sense
- Warranty:**  
One-year limited
- Approvals:**  
FM  
NTEP  
OIML