

Picture is a representation of actual product.

#### **Approvals**




#### **Order Information**

Load Rating	Part#	Est. Weight	Price	
1,250 lb	119796	3 lb	Consult	
2,500 lb	119797	3 lb	Consult	

## **Dimensions**

Rated Capacity	A	В	С	D	E	F	T
lb/in							
1,250	11.50	10.47	1.25	6.47	0.47	0.53	1/2-13 UNC
2,500	11.50	10.47	1.62	6.47	0.47	0.66	5/8-11 UNC

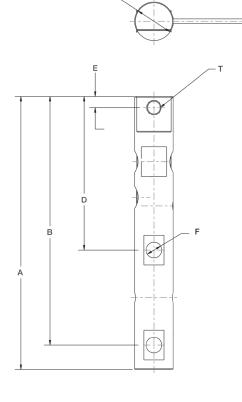

## Interchangeable Products

AVERY WEIGH TRONIX®

Weigh Bar

## **Specifications**

## **Full Scale Output:**

2.0 (± 0.1%) mV/V

#### **Output Resistance:**

350 (± 3) ohm

## Input Resistance:

385 (± 10) ohm

#### Material/Finish:

Stainless steel

#### **Temperature:** Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

**Seal Type:**Environmentally sealed, IP67

## Safe Overload:

150% full scale

Safe Sideload:

## 100% full scale

**Rated Excitation:** 5 to 10 VDC

## **Combined Error:**

0.02% full scale

# Non-repeatability:

± 0.01% full scale

# **Insulation Resistance:**

5,000 megohm

# Cable Length:

20 ft

#### **Cable Diameter:**

0.190 in

Polyurethane jacket

# **Cable Color Code:**

Green +Excitation Black –Excitation

White +Signal

Red -Signal

# Warranty:

Two-year limited

## Approvals:

NTEP 11-024