


# EL144 Communications Cable

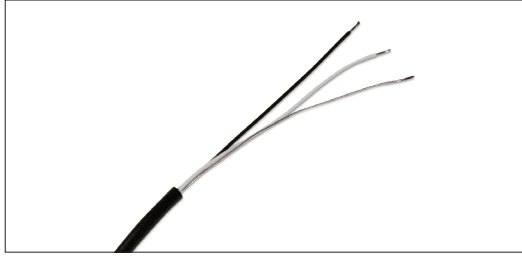


## Standard Features

- Two-conductor with bare ground
- RFI/EMI protected with foil shield
- 20 gauge conductors
- Perfect for RS-232, two-wire RS-485 and 20 mA current loop communications
- Diameter: 0.19 in
- Conductor colors are black and white

## Part Number/Price

| Part # | Description     | Price      |
|--------|-----------------|------------|
| 32803  | EL144           | Consult/ft |
| 72691  | EL144, 100 ft   | Consult    |
| 72072  | EL144, 500 ft   | Consult    |
| 72693  | EL144, 1,000 ft | Consult    |

# BCD Cable

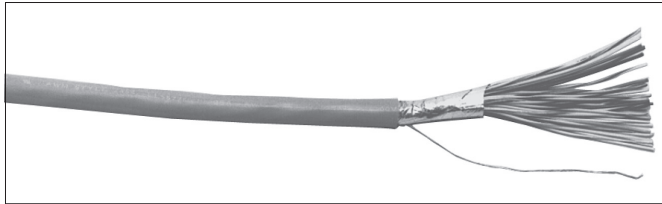

## Standard Features

- Sheathed in gray PVC
- Mylar aluminum foil shield with stranded tinned copper drain wire
- Diameter: 0.375 in

## Part Number/Price

| Part # | Description               | Price      |
|--------|---------------------------|------------|
| 15497  | BCD, 24 AWG, 30-conductor | Consult/ft |

HARDWARE AND ACCESSORIES

# Fiber-Optic Cable



Color Code: Black-TXD, Blue-RXD

## Standard Features

- Duplex cable polyethylene black jacket material
- 4.4 + 0.10 mm outer diameter of duplex cable
- 2.2 + 0.007 mm single cable outer diameter
- Operating temperature: 32 °F to 158 °F (0 °C to 70 °C)

## Part Number/Price

| Part # | Description              | Price      |
|--------|--------------------------|------------|
| 78910  | Custom length            | Consult/ft |
| 78026  | 100 ft cable             | Consult    |
| 78027  | 200 ft cable             | Consult    |
| 78028  | 300 ft cable             | Consult    |
| 83052* | Fiber-optic connector    | Consult    |
| 80892  | Fiber-optic cable cutter | Consult    |
| 85548  | Fiber-optic hot knife    | Consult    |

\*Duplex fiber cable requires two connectors