

BenchMark® CW-80B

Light-capacity Bench Scale

BENCH SCALES



Standard Features

- NTEP Certified, IP67 stainless steel load cell
- 304 stainless steel construction
- LifeGuard™ base design isolates load cell from overloads and shock loads for added durability
- Specially designed adjustable support feet provide exceptional traction and won't scratch surfaces

Specifications

Load Cell, NTEP Certified:
IP67 stainless steel and environmentally sealed

Output Impedance:
350 ohm

Maximum Overload:
200%

Overload Protection:
Shock-absorbing spider

Scale Frame:
AISI304L, straight line finish, Ra= 45 +/- 10

Scale Cover:
AISI304L, straight line finish, Ra= 45 +/- 10

Cable Length:
10 ft (3 m)

Compensated Temperature Range:
14 °F to 104 °F (-10 °C to 40 °C)

Warranty:
Two-year limited

Approvals:
NTEP 96-107, Class III, 3000 d
Measurement Canada AM-5156
Load cell is FM approved

Approvals



Measurement
Canada
Approved



Part Number/Price

Part #	Platform Capacity	Dimensions (L × W × H)	Est. Weight	Price
35075	6 lb (3 kg)	10 × 10 × 3.15 in	13 lb	Consult
35076	10 lb (5 kg)	10 × 10 × 3.15 in	13 lb	Consult
35077	15 lb (7 kg)	10 × 10 × 3.15 in	13 lb	Consult
35078	30 lb (15 kg)	10 × 10 × 3.15 in	13 lb	Consult
35079	30 lb (15 kg)	12 × 12 × 3.25 in	14 lb	Consult
35080	60 lb (30 kg)	12 × 12 × 3.25 in	14 lb	Consult


Options/Accessories

Part #	Description	Catalog Page #
Consult	Scale columns	See page 204
Consult	Ball transfer and roller conveyor scale tops	See page 203
Consult	Mobile scale carts	See page 199 to page 202

Dimensions

CW-80B			
10 × 10 in			
H	3.15 in	W	10.00 in
L	10.00 in	W1	10.25 in
L1	10.25 in		

Note: 1 in = 25.4 mm

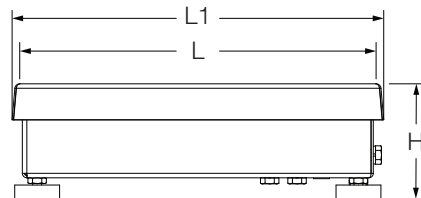

12 × 12 in			
H	3.25 in	W	12.00 in
L	12.00 in	W1	12.25 in
L1	12.25 in		

Note: 1 in = 25.4 mm

