

T2P1

Alloy Steel, Environmentally Sealed, IP67



Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
20,000 lb	17660	30 lb	Consult
50,000 lb	17661	65 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
lb/in													
20,000	8.50	2.63	2.75	0.50	1.00	3.38	1.38	1.81	1.00	5.81	4.00	5.00	1 1/2-12 UNF × 2 DP
50,000	11.44	3.75	4.00	0.63	1.00	5.00	1.38	1.81	1.00	5.81	5.75	6.50	2-12 UNF × 2.63 DP

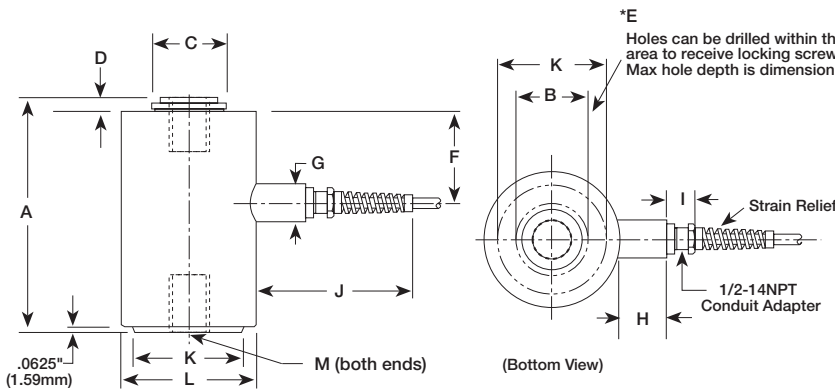

Interchangeable Products

FAIRBANKS®
657090, 657091
 STREETER RICHARDSON®
2011711, 2011712

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
350 (± 3.5) ohm
- Input Resistance:**
350 (± 3.5) ohm
- Material/Finish:**
High-alloy steel, epoxy coated
- Temperature:**
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 20 VDC
- Combined Error:**
± 0.03% full scale
- Repeatability:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Deflection at Capacity:**
20,000 lb: 0.0075 in
50,000 lb: 0.0100 in
- Cable Length:**
35 ft
- Cable Color Code:**
Green +Excitation
Black -Excitation
White +Signal
Red -Signal
Yellow Shield
- Warranty:**
Three-year limited
- Approvals:**
FM