



Picture is a representation of actual product

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
250 lb	46659	2 lb	Consult
500 lb	46661	2 lb	Consult
750 lb	46662	2 lb	Consult
1,000 lb	46663	2 lb	Consult
1,500 lb	46664	2 lb	Consult
2,000 lb	46665	2 lb	Consult
2,500 lb	46666	3 lb	Consult
3,000 lb	46667	2 lb	Consult
5,000 lb	46668	4 lb	Consult
10,000 lb	46669	4 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E
lb/in					
250	3/8-24 UNF	0.75	0.50	2.00	3.00
500 to 1,500	1/2-20 UNF	1.00	0.75	2.00	3.00
2,000 to 3,000	1/2-20 UNF	1.25	1.00	2.00	3.00
5,000	3/4-16 UNF	1.25	1.00	3.00	4.25
10,000	3/4-16 UNF	1.25	1.00	3.50	4.25

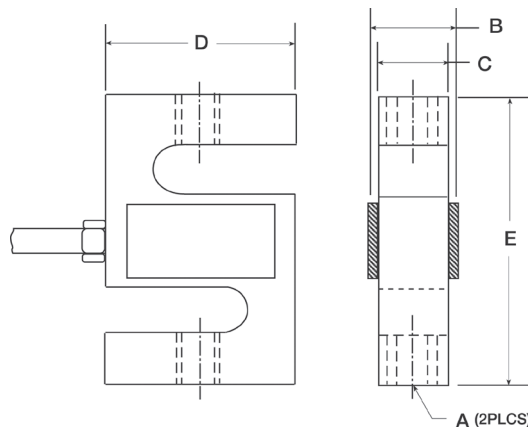

**Interchangeable Products**

VPG® SENSORTRONICS®  
60050 .....page 276

**Specifications**

- Full Scale Output:**  
3.0 mV/V nominal
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
385 (± 5) ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Operating:  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 15 VDC
- Nonlinearity:**  
0.03% full scale
- Hysteresis:**  
0.02% full scale
- Insulation Resistance:**  
5,000 megohm
- Cable Length:**  
20 ft
- Cable Diameter:**  
0.200 in  
Polyurethane jacket
- Cable Color Code:**  
Red +Excitation  
Black -Excitation  
Green +Signal  
White -Signal
- Warranty:**  
One-year limited
- Approvals:**  
cFMus