



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
250 lb	46659	2 lb	Consult
500 lb	46661	2 lb	Consult
750 lb	46662	2 lb	Consult
1,000 lb	46663	2 lb	Consult
1,500 lb	46664	2 lb	Consult
2,000 lb	46665	2 lb	Consult
2,500 lb	46666	3 lb	Consult
3,000 lb	46667	2 lb	Consult
5,000 lb	46668	4 lb	Consult
10,000 lb	46669	4 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E
lb/in					
250	3/8-24 UNF	0.75	0.50	2.00	3.00
500 to 1,500	1/2-20 UNF	1.00	0.75	2.00	3.00
2,000 to 3,000	1/2-20 UNF	1.25	1.00	2.00	3.00
5,000	3/4-16 UNF	1.25	1.00	3.00	4.25
10,000	3/4-16 UNF	1.25	1.00	3.50	4.25

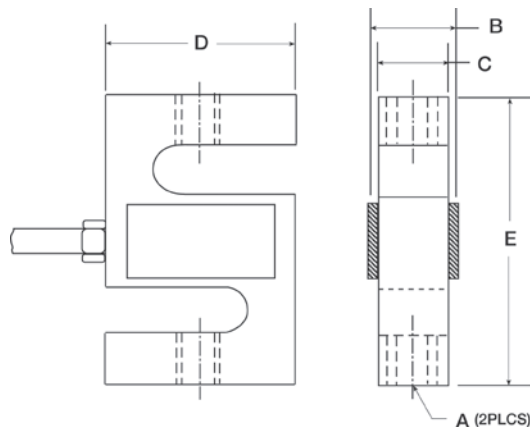

Interchangeable Products

VPG® SENSORTRONICS
60050 page 292

Specifications

- Full Scale Output:**
3.0 mV/V nominal
- Output Resistance:**
350 (± 3) ohm
- Input Resistance:**
385 (± 5) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Nonlinearity:**
0.03% full scale
- Hysteresis:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
20 ft
- Cable Diameter:**
0.200 in
Polyurethane jacket
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus