

UPS3000 Digital Pressure Indicator



UPS3000

Discontinued models:

UPS3110 - 19 inch wide Rack-Mountable Version of UPS3000 with patented precision ORION valve assembly and vernier.

UPS3210 - 19 inch wide Rack-Mountable Version of UPS3000 Consult Factory for Repair/Calibration Service

DIGITAL INDICATORS/GAUGES

STANDARD FEATURES

- Portable table top, optional panel mount kit available
- Available in 8 sets of ranges: 10,000/5,000/2,000 psi, 5,000/2,500/1,000 psi, 2,000/1,000/400 psi, 50/25/10 psi, 1,000/500/200 psi, 500/250/100 psi, 100/50/20 psi, 15/7.5/3 psi
- Three independent selectable ranges in each instrument
- ±0.05% F.S. accuracy of each independent selectable range
- 16 gauge painted mild steel case
- No potentiometers or analog adjustments for calibration
- Push button zero
- 0.02% F.S. display resolution typical for each range
- Absolute and/or gauge switch selectable calibration modes
- Multi-conversion unit with 10 conversions standard: inH₂O, mmHg, inHg, kPa, BAR, mBAR, cmH₂O, Kg/cm² and % F.S.
- Different technicians can operate the system and get identical results
- Gases or fluids compatible with 17-4PH may be used
- Calibration certificate included; traceable to the National Institute of Standards and Technology (NIST)

APPLICATIONS

- Transfer standard
- Pressure monitor
- Pressure switch testing
- Relief valve testing

SPECIFICATIONS

Available Calibration Modes:

Gauge, absolute, or gauge and absolute switch-selectable

Overall Accuracy:

±0.05% F.S. maximum each range. Accuracy statement includes all effects of linearity, hysteresis, repeatability and ambient temperature.

Temperature Range:

Operating: 40°F to 140°F (4°C to 60°C)
Storage: 0°F to 185°F (-17°C to 85°C)
Relative humidity: 95%, non-condensing

Pressure Media:

Any media compatible with 17-4PH stainless steel

Pressure Sensor Type:

Bonded, metal foil strain gauge or equal

Pressure Connection:

Pressure fitting; 7/16-20UNF-2A: 37° flare; AN-4 20,000 psi unit and 30,000 psi unit; Autoclave AE F250-C

Overpressure Capability:

750% on low range
300% on mid range
150% on high range

Numerical Pressure Display:

Digital type: High intensity, red LED, 0.43 in. high
Active digits: Five full decades
Polarity indication: “—” sign

Pressure to Digital Conversion:

Conversion rate: Data updated at the rate of 12 times per second, nominal
Display resolution: Nominally 0.02% of F.S. for each pressure range

Input Voltage:

115 or 230 VAC, ±10%, 50/60 Hz voltage selected via transformer taps

Power Consumption:

8 watts, typical

Line Filter:

Line to line and line to neutral

Mounting Styles:

Table top with rubber feet or panel mounted with adapter kit

Construction:

Single piece outer case with slide out drawer

Case Material:

16 gauge, mild steel with textured finish, baked epoxy enamel paint

Multi-Conversion:

10 units can be stepped through at the touch of a button. psi, kPa, mmHg, BAR, mBAR, inHG, cmH₂O, Kg/cm², inH₂O, and % F.S. are included. Replaces analog pressure display

Weight:

UPS3000: approximately 13 lb (5.8 kg)

Peak Hold:

Last highest pressure reading stored in memory and recalled at the touch of a button. Calibrates burst discs and relief valves

Freeze Mode:

External switch contact, change of state, freezes display reading for three seconds. Calibrates pressure switches

Battery:



Self-contained rechargeable battery provides a minimum of six hours of completely portable usage. May be operated or recharged by connecting the power cord to 115 VAC. Handle, power switch, and low battery indicator included with this option. Analog display not included with this option. Also not available in rack-mount models

Outputs:


Analog: 4-20 mA, 0-10 VDC, 0-5 VDC
Digital: Parallel BCD, 20 mA loop, RS-232 simplex output

Min/Max:

Highest and lowest pressure readings stored in memory and recalled at the touch of a button

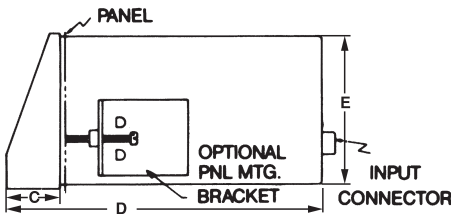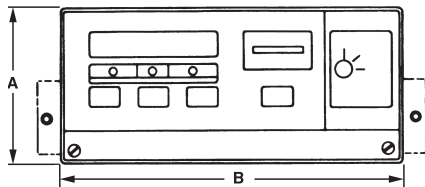

Panel cutout



UPS3000 DIMENSIONS

A	4.93 in. (125.22 mm)
B	10.81 in. (274.57 mm)
C	1.75 in. (44.45 mm)
D	9.9 in. (251.00 mm)
E	4.69 in. (119.12 mm)
F	4.75 in. (120.65 mm)
G	10.62 in. (269.74 mm)

UPS3000 Digital Pressure Indicator

MODEL/PRICE

MODEL CONFIGURATION	DESCRIPTION	EST. SHIP WEIGHT	LIST PRICE
UPS3000 - non battery models			
UPS3000 ()A()	5000/2500/1000 psi	15 lb	Consult
UPS3000 ()B()	1000/500/200 psi	15 lb	Consult
UPS3000 ()C()	500/250/100 psi	15 lb	Consult
UPS3000 ()D()†	100/50/20 psi	15 lb	Consult
UPS3000 ()E()†	50/25/10 psi	15 lb	Consult
UPS3000 ()F()	2000/1000/400 psi	15 lb	Consult
UPS3000 ()G()††	10,000/5000/2000 psi	15 lb	Consult
UPS3000 ()J()††	15/7.5/3 psig	15 lb	Consult

† Available in gauge only or absolute only calibration modes.

†† Available as gauge only.

Consult Factory for Availability and Pricing

UPS3000 Model Numbering Guide

UPS3000(_)(_)(_)

POWER

- A = 115 VAC 50/60 Hz
- B = Battery operation & 115 VAC 50/60 Hz (**NO LONGER AVAILABLE**)
- C = 230 VAC 50/60 Hz
- D = Battery operation & 220 VAC 50/60 Hz (**NO LONGER AVAILABLE**)

RANGE

- A = 5000/2500/1000 psi
- B = 1000/500/200 psi
- C = 500/250/100 psi
- D = 100/50/20 psi†
- E = 50/25/10 psi†
- F = 2000/1000/400 psi
- G = 10,000/5000/2000 psi††
- J = 15/7.5/3 psig††

CALIBRATION MODES

- A = Gauge only
- B = Absolute only
- C = Gauge or Absolute, switch-selectable

Determine model configuration before ordering

Example: UPS3000ADA = UPS3000 (A)115 VAC 50/60 Hz, (D)100/50/20 psi, (A) gauge only

OPTIONS/ACCESSORIES

PART #	DESCRIPTION	PRICE
57775	Peak hold (A calibration mode only)	Consult
57798	Peak hold (C calibration mode only)	Consult
57778	Freeze mode	Consult
57785	0-10 VDC/4-20 mA analog output (AC only models)	Consult
57788	RS-232 simplex output (AC only models) (No longer available use 57799)	OBSOLETE
57790	Min/Max feature (A and B calibration modes only)	Consult
57796	Min/Max feature (C calibration mode only)	Consult
57799	0-10 VDC/4-20 mA analog and RS-232 simplex output (AC only models)	Consult
55576	Interface cable to APC4000 (UPS3000 only)	Consult
19297	Panel mount adapter kit (UPS3000 only)	Consult
55844	Spare battery (UPS3000 only)	Consult
63253	Additional operating manual	Consult

Some option combinations are not available. Please consult factory for these combinations.