



Specifications

Power:

Line voltages: 115 to 230 VAC
Frequency: 50/60 Hz

Power Consumption:

1.5 A at 115 VAC (8 W)
0.75 A at 230 VAC (8 W)

Excitation Voltage:

+5 VDC 8 × 350 ohm or 16 × 700 ohm load cells

Analog Signal Input Range:

-0.5 mV/V to 4.5 mV/V

Analog Signal Sensitivity:

0.3 uV/graduation minimum
1.5 uV/graduation recommended

A/D Sample Rate:

7.5 to 960 Hz software selectable

Resolution:

Display: 100,000 counts

System Linearity:

± 0.01% full scale

Digital I/O:

Four channels on CPU board

Circuit Protection:

RFI, EMI, ESD protection

Annunciators:

Designators for percent, kg, gm, lb, oz, center of zero, G/B, N, T, PT, neg, motion

Display:

Large 0.8 in 14-segment, six-digit high-intensity red LED display

Keys/Buttons:

Piezo keypad, 11 keys with international symbols

Temperature Range:

Certified: 14 °F to 104 °F (-10 °C to 40 °C)

Rating/Material:

IP69K, 304 stainless steel

Warranty:

Three-year limited

Approvals:

NTEP CC 08-092, Class III/IIIL 10,000 d
Measurement Canada AM-5710
OIML R76/2006-GBI-10.02
TC11569
CE Marked
cULus Listed

Approvals



Measurement
Canada
Approved




Dimensions

CW-90X	
A	9.50 in (241 mm)
B	10.02 in (255 mm)
C	11.24 in (285 mm)
D	3.12 in (79 mm)
E	6.00 in (152 mm)
F	8.57 in (218 mm)
G	3.75 in (95 mm)
H	4.00 in (102 mm)

Standard Features

- Gore-Tex® breather vent
- Storage for up to 50 IDs
- Unit of measure: kg, gm, lb, oz, lb/oz
- LED display
- Two full duplex serial ports
- Configurable print formats
- Audit trail tracking
- Optional communications: Ethernet, USB or fiber-optic
- Four configurable digital I/O
- Reflash memory to upgrade firmware
- Auto print capability
- Battery backed up time and date
- Accumulator
- Piezo keypad consisting of zero, units, print, tare, over, under, ID, target, enter, menu, power

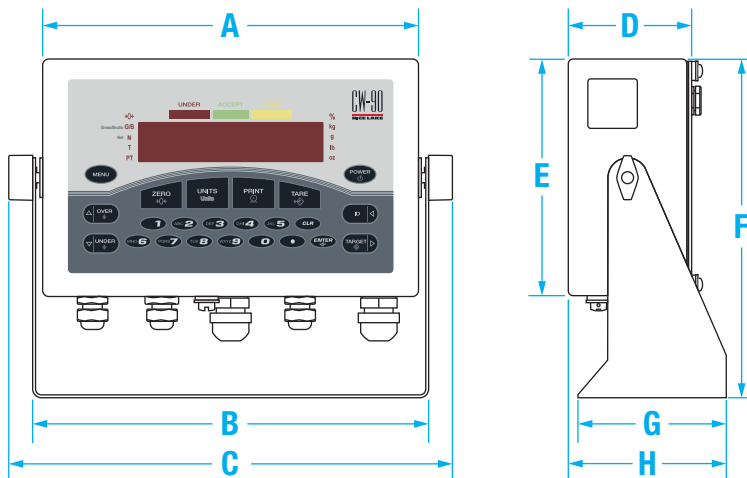

CW-90X

Checkweigh Indicator

Part Number/Price

Part #	Description	Est. Weight	Price
105972 [†]	CW-90X, 115 VAC	7 lb	Consult
105973 ^{††}	CW-90X, 230 VAC, CE marked/OIML approved	7 lb	Consult
118889 [†]	CW-90X, 230 VAC	7 lb	Consult
171248 ^{†††}	CW-90X, 230 VAC	7 lb	Consult



[†] US plug (NA) - Type B



^{††} Euro Plug - Type E



^{†††} IEC Type I plug

Options/Accessories

Part #	Description	Price
200578	Ethernet TCP/IP, 10 ft cable included	Consult
206272	RS-232/Wi-Fi interface 802.11 A/B	Consult
95357	USB cable, Type A to mini-B, 1 m	Consult
171968	Firmware download cable	Consult
96736	Fiber optic board	Consult
78026	Fiber optic, duplex cable 100 ft	Consult
80892	Fiber optic cutter	Consult
117358	WeighVault™ (requires part number 200578 or 206272)	Consult

To have your option factory installed, please specify when placing your order.

INDICATORS /
CONTROLLERS