


# EL214T Cable Splicing Kit

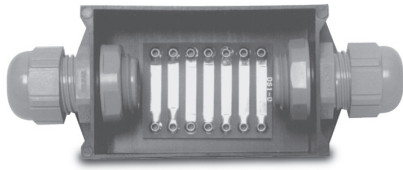

## Standard Features

### EL214T

- Designed to accommodate cables larger than the EL214; all other dimensions and performance features are the same
- Solder terminals

## Specifications

### Dimensions:

(L × W × H)  
3.00 × 1.00 × 1.50 in

### Mounting Centers:

2.50 in

### Number of Connections:

Seven

### Cable Diameter:

0.187 to 0.312 in

### Cure Time For Potting:

Two hours at 73 °F (23 °C)

## Part Number/Price

Part #	Description	Price
15486	EL214T	Consult

# EL215 Cable Splicing Kit



## Standard Features

- Designed for use in weather-exposed or direct-burial locations
- Each kit contains plastic splicing tube, circuit board, insulating resin and instructions
- Solder terminals

## Specifications

### Dimensions:

(L × W)  
6.00 × 1.38 in

### Number of Connections:

7

### Cable Diameter:

Up to 0.75 in

### Cure Time For Potting:

2 hours at 70 °F (21 °C)

## Part Number/Price

Part #	Description	Price
15612	EL215	Consult

# Flintec® Load Cell Cable

Replacement Kits



## Standard Features

- Each kit includes cable for four Flintec SB4 load cells as listed

## Part Number/Price

Part #	Description	Cable Length Ea. Feet	Price
18412	For SB4, 225 to 5,200 lb	10 ft	Consult
18413	For SB4, 11,250 to 22,500 lb	15 ft	Consult