


# EL144 Communications Cable

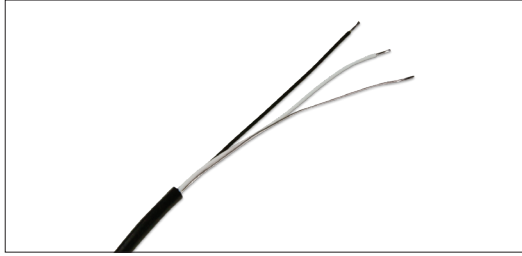


## Standard Features

- Two-conductor with bare ground
- RFI/EMI protected with foil shield
- 20 gauge conductors
- Perfect for RS-232, two-wire RS-485 and 20 mA current loop communications
- Diameter: 0.19 in
- Conductor colors are black and white

## Part Number/Price

Part #	Description	Price
32803	EL144	Consult/ft
72691	EL144, 100 ft	Consult
72072	EL144, 500 ft	Consult
72693	EL144, 1,000 ft	Consult

# BCD Cable

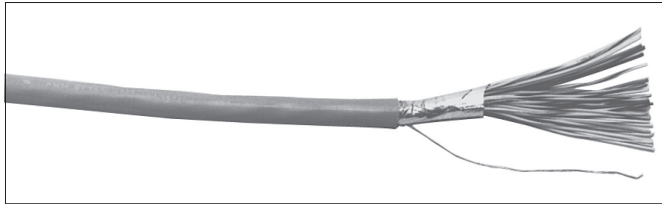

## Standard Features

- Sheathed in gray PVC
- Mylar aluminum foil shield with stranded tinned copper drain wire
- Diameter: 0.375 in

## Part Number/Price

Part #	Description	Price
15497	BCD, 24 AWG, 30-conductor	Consult/ft

HARDWARE AND ACCESSORIES

# Fiber-Optic Cable



Color Code: Black-TXD, Blue-RXD

## Standard Features

- Duplex cable polyethylene black jacket material
- 4.4 + 0.10 mm outer diameter of duplex cable
- 2.2 + 0.007 mm single cable outer diameter
- Operating temperature: 32 °F to 158 °F (0 °C to 70 °C)

## Part Number/Price

Part #	Description	Price
78910	Custom length	Consult/ft
78026	100 ft cable	Consult
78027	200 ft cable	Consult
78028	300 ft cable	Consult
83052*	Fiber-optic connector	Consult
80892	Fiber-optic cable cutter	Consult
85548	Fiber-optic hot knife	Consult

\*Duplex fiber cable requires two connectors