


Picture is a representation of actual product.

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
15 kg	76771	3 lb	Consult
20 kg	76772	3 lb	Consult
50 kg	76774	3 lb	Consult
75 kg	76775	3 lb	Consult
100 kg	76776	3 lb	Consult
150 kg	84820	3 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
kg/mm													
15 to 150	35.0	13.0	40.0	13.0	13.0	35.0	75.0	150.0	19.0	100.0	19.0	6.2	25.0

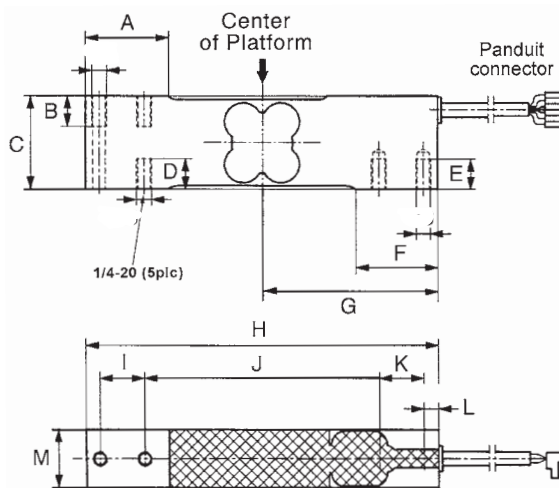

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RLPWM15.....page 156
- VPG® TEDEA-HUNTLEIGH®
1142*page 318

*Color code is different

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
359 (± 5) ohm
- Input Resistance:**
380 (± 15) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated:
14 °F to 104 °F (-10 °C to 40 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 15 VDC
- Total Error:**
0.02% full scale
- Insulation Resistance:**
1,000 megohm
- Deflection at Capacity:**
0.2 mm
- Cable Length:**
10 ft
- Cable Diameter:**
0.190 in PVC jacket
- Cable Color Code:**
Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Grey -Sense
- Warranty:**
One-year limited
- Approvals:**
FM
NTEP

