


Z6

Stainless Steel, Welded Seal, OIML C3, IP68

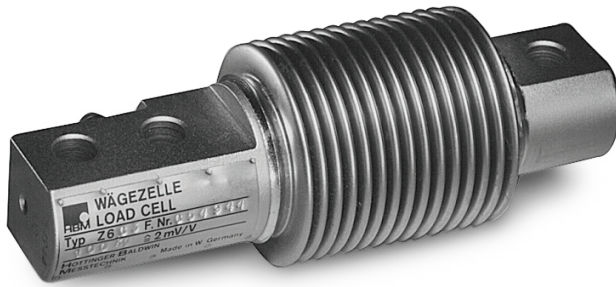

Picture is a representation of actual product.

Approvals





Available upon request

Order Information

Load Rating	Part #	Est. Weight	Price
OIML C3			
10 kg	36173	2 lb	Consult
20 kg	36174	2 lb	Consult
50 kg	36175	2 lb	Consult
100 kg	36176	2 lb	Consult
200 kg	36177	2 lb	Consult
OIML D1			
5 kg	36172	2 lb	Consult

Dimensions

Rated Capacity	H	L	L1	L2	L3	L4	L5	L6	W	W2	D
kg/mm											
5 to 200	31.0	123.0	18.0	82.0	9.9	21.0	45.0	27.9	42.0	20.1	8.2

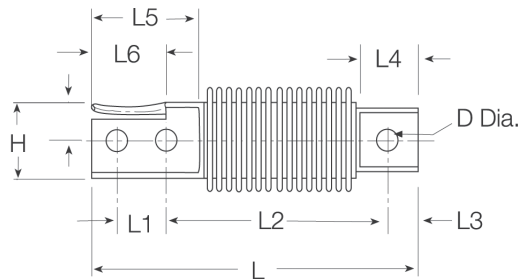

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL9018SSpage 111
- RICE LAKE WEIGHING SYSTEMS
RLHBB
- VPG® REVERE
SHB page 253
- METTLER TOLEDO®
MTB

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
356 ohm
- Input Resistance:**
350 to 400 ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Welded-seal, IP68
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 15 V DC
- Combined Error:**
0.05% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
10 ft
- Cable Diameter:**
0.190 in PVC jacket
- Cable Color Code:**
Blue +Excitation
Black -Excitation
White +Signal
Red -Signal
Green +Sense
Grey -Sense
- Warranty:**
One-year limited
- Approvals:**
FM
OIML
Ex (available upon request)