Honeywell® DMXREW1

Label Rewinder/Unwinder

Approvals

UL LISTED   CSA
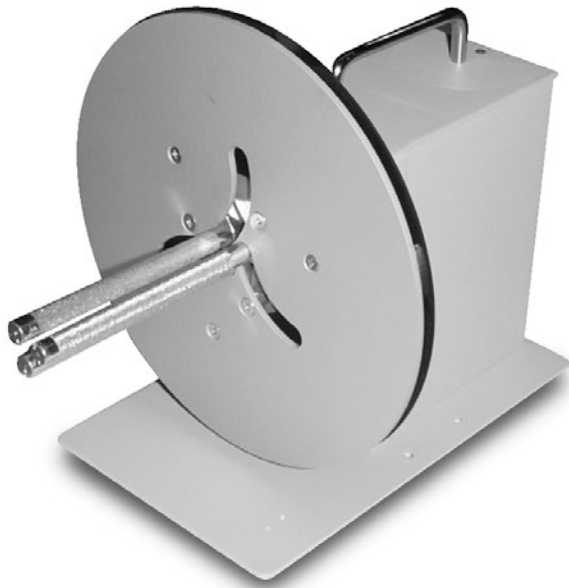
Part Number/Price

Part #	Description	Est. Weight	Price
68517	Honeywell® REW1 label rewinder/unwinder, 115 VAC	13 lb	Consult

Standard Features

- Rewinds or dispenses label rolls up to 4 in (101.6 mm) wide, up to 8 in (203 mm) diameter at 10 in (254 mm) per second
- Adjustable core holder
- Coreless rewinding
- Steel construction
- Anti-slip feet
- Constant adjustable Torque™ technology
- Bidirectional operation
- ON-OFF start/stop switch
- Inner label flange to keep edge of label web aligned as labels are rewound
- Compatible with all Datamax-O'Neil® I Series and Rice Lake SURVIVOR® SST printers

Specifications

Label Width:
Up to 4.5 in (113 mm)

Maximum Label Roll Weight:
8.5 lb (3.9 kg)

Label Roll Diameter:
Up to 8 in (200 mm)

Core Diameter:
Use any cardboard core from 1 to 4 in (25 to 102 mm)

Speed:
Up to 10 ips (25+ mm/sec)
Switch adjustable rewind force
No adjustments are required

Start/Stop:
Convenient ON-OFF switch

Direction:
Bidirectional

Power Requirements:
115 VAC 60 Hz

Overall Size:
(L × W × H)
11.00 × 9.00 × 6.00 in
(279 × 152 × 229 mm)

Weight:
13 lb (5.9 kg)

Approvals:
UL listed, CSA certified

Warranty:
Parts and labor: one-year limited

PRINTERS