



Specifications

Power:

AC voltages: 100 to 240 VAC; 50/60 Hz
120 watt (120 VAC)

Output Interface:

Ethernet TCP/IP, independently configurable
echo port

Input Data Format:

Baud rate: 1200, 2400, 4800, 9600, 19200, 38400,
57600 and 115200 self-learning or configurable

Update:

Continuous or out-of-motion modes
Message interrupt mode

Digital I/O:

Four I/O read or set
5 V logic

Communication Ports:

Ethernet TCP/IP, RS-232, RS-485, 20 mA

Character Format:

7 or 8 data bits; even, odd, or no parity;
1 or 2 stop bits

Maximum Viewing Distance:

4-inch character 100 ft (30 m)
5-inch character: 150 ft (46 m)

Viewing Angle:

160°

Display:

Bright, outdoor color LED lamps
128 × 32 pixel, 4 mm pitch
Decimal or comma indication
Weight display with units and mode
Message display 1, 2 or 4 lines

Keys/Buttons:

Zero, Gross/Net, Tare, Units, Print, Menu

Time:

Software enable, 12 or 24 hour format

Date:

Software enable, US or ISO format

Temperature:

Operating:
-40 °F to 120 °F (-40 °C to 49 °C)

Rating/Material:

IP66
Mild steel, powder-coated

Weight:

20 lb (9 kg)

Warranty:

Two-year limited

Approvals:

NTEP 22-096
Measurement Canada AM-6210C





Approvals



Measurement
Canada
Approved

Dimensions

LaserLight3			
A	23.00 in (584 mm)	E	5.00 in (127 mm)
B	10.10 in (256 mm)	F	8.00 in (203 mm)
C	8.73 in (222 mm)	G	25.02 in (636 mm)
D	5.87 in (149 mm)		

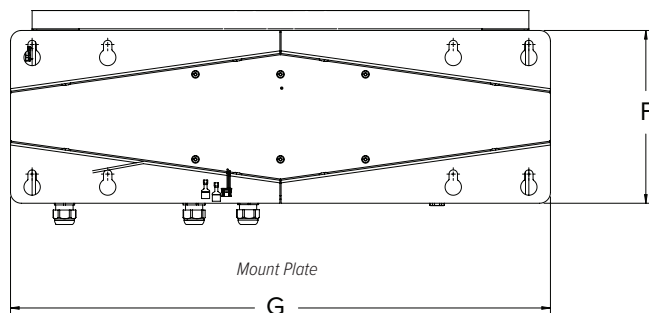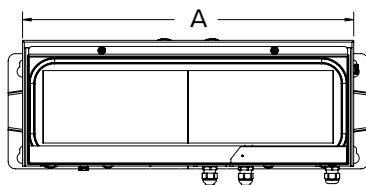

Standard Features

- Color display
- Displays six high-intensity digits up to 5 in height
- Adjustable daylight/night intensity
- Mirror mode (reverse image) function
- Durable weather tight enclosure with flip-down door
- Flat-wall mounted or add VESA or offset mount

Options

- Wireless LAN, Wi-Fi interface 802.11 a/b
- Wireless interface, pair of ConnexLink™ radios and mount
- Pole mount kit, VESA flat wall for 2 to 6 inch pole (W × H) 200 × 100 mm, 6 fasteners (M4 × 8 mm)
- Sunshade visor, 8-inch painted steel

LaserLight3™

Color Large-Display Weight Indicator


Part Number/Price

Part #	Description	Est. Weight	Price
205780	LaserLight3 large-display weight indicator	20lb	Consult


Options/Accessories

Part #	Description	Price
212745	Pole mount kit, VESA flat-wall, 200 mm W x 100 mm H, 6 fasteners (M4 x 8 mm) for 2-6 inch pole	Consult
75856	Pole mount kit, 4-in flange style (24-in wide frame use with 4-8 in dia. pole)	Consult
208807	Sunshade, 8-in	Consult
209118	Wireless LAN, RS-232/Wi-Fi interface 802.11 a/b XPico module	Consult
212753	Wireless interface, pair of ConnexLink radios transceiver kit and mount	Consult


INDICATORS /
CONTROLLERS

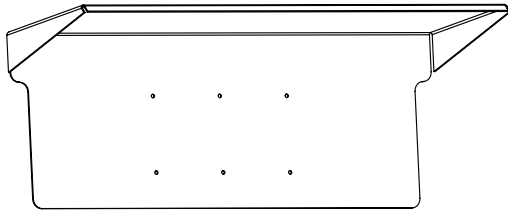

Sunshade
PN 208807

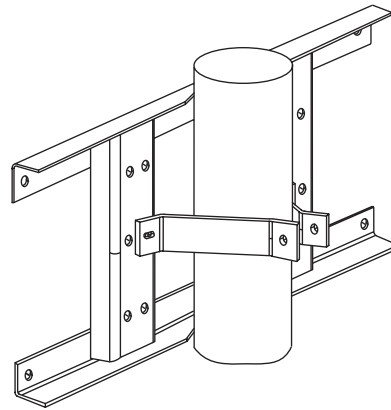

Flange pole mount kit
PN 75856

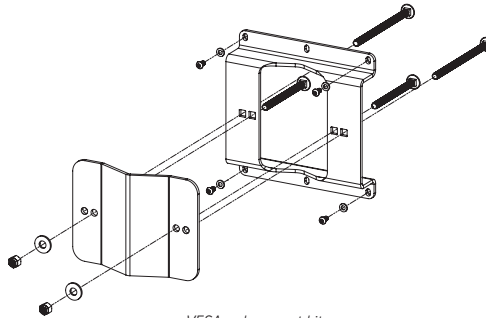

VESA pole mount kit
PN 212745