



### Part Number/Price


Part #	Description	Est. Weight	Price
139381	MSI-8000 RF remote display	5 lb	Consult

### Options/Accessories

Part #	Description	Est. Weight	Price
149549	Universal 115/230 VAC 50/60 Hz (NA plug standard) battery charger for MSI-8000 RF remote display	3 lb	Consult
149550	Universal 115/230 VAC 50/60 Hz (EC plug standard) battery charger for MSI 8000 RF remote display	1 lb	Consult
150964	DB9 female serial interface cable for MSI-8000 RF remote display	1 lb	Consult
151095	Audible alarm	—	Consult

### Dimensions

MSI-8000			
A	8.00 in (203 mm)	C	3.85 in (98 mm)
B	3.85 in (98 mm)	D	1.37 in (35 mm)

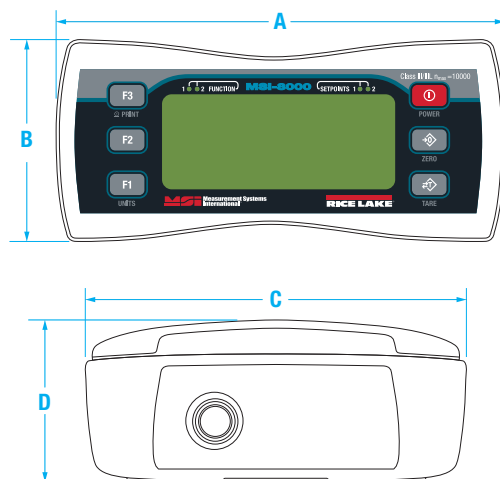

### Standard Features

- Compatible with all ScaleCore™ based products including: MSI-7300 Dyna-Link 2, MSI-3460 Challenger 3, MSI-4260 Port-A-Weigh, MSI-7000 and MSI-7001 TranSend™, MSI-9600HT and MSI-6360
- LCD display
- Membrane keypad for remote control functionality
- User-definable function keys for added versatility
- Universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)

(Contact MSI for application consultation)

### Specifications

#### Enclosure:

NEMA Type 4, IP65

#### Weight:

0.98 lb (445 g)

#### Keypad:

On/Off, Zero (100%), Tare, Print and two user-defined keys for the following functions: peak hold, high resolution, total, view total, net/gross, units switching

#### Display:

Six-digit 1.0 in (26.4 mm) LCD screen

#### Units Displayed:

Pounds, kilograms, tons, metric tons, kilonewtons

#### Annunciators:

Stable, COZ, low battery, peak, net, kg, kN, lb, M, ton, setpoint, function LEDs

#### Power:

Integral lithium-ion battery  
Universal 115/230 VAC, 50/60 Hz battery charger (NA plug included)

#### Operating Time:

Up to 24 hours of continuous use (15 minute auto-shutoff with non-use)

#### Operating Temperature:

-4 °F to 140 °F (-20 °C to 60 °C)

#### RF Radio Link:

2.4 GHz 802.15.4  
Communicates with RF 3460, 4260, 7300, 7000 & 7001

#### RF Effective Range:

Typically 100 to 300 ft, line of sight; for longer range consult factory

#### Connector:

Four-pin Turck connector for charging and RS-232 communication

#### Warranty:

One-year limited