


Okidata 186 Plus

Microline Printers

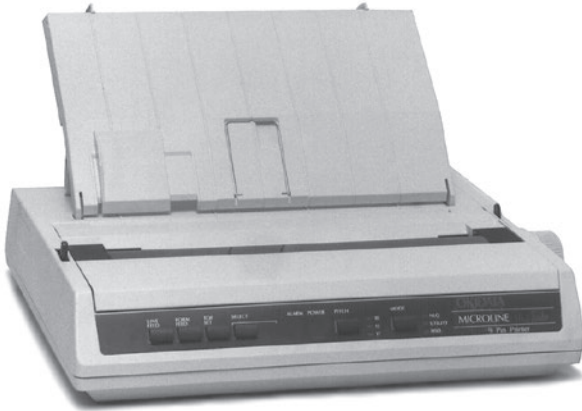

Standard Features

- Vertical tabs
- Long-lasting, self-inking ribbon cartridge
- Bit image graphics for plotting charts, graphs and drawings
- Full ASCII character set
- Friction and adjustable pin feed paper handling
- Nine-pin, long-life print head
- RS-232 (DB-25F) and USB interface
- Near letter-quality printing at 50 characters per second
- Superscripts, subscripts and underlining
- Bottom, rear or top feed

Part Number/Price

Part #	Description	Est. Weight	Price
189603	Okidata 186 Plus Printer with RS-232 and USB 115 VAC	10 lb	Consult

Options/Accessories

Part #	Description	Price
20236	Tractor feed kit with friction rollers	Consult
20664	Ribbon cartridge black	Consult
21208	Protective dust cover	Consult
41364	Additional operating manual	Consult
Cables		
15547	Blunt end, 25-Pin D-sub male RS-232 serial interface cable (Rice Lake indicators)	Consult

Specifications

Print Method:

Nine-Pin (0.34 mm dia.) serial impact dot matrix

Graphics Resolution:

240 x 216 maximum

Print Speed* (CPS):

NLQ: 62; Utility: 250; High Speed Draft: 333; Super Speed Draft: 375

Feed Rate:

2.0 ips

Emulations:

IBM® 2480 Epson E6C/P or OKI® Microline®

Interface:

USB, RS-232 (DB-25F)

Compatibility:

186/Windows® XP, 2000, 98/95

Receive Buffer:

One line buffer

Paper Input:

Cut sheet, 7.2 in to 8.5 in W
(182.9 mm to 215.9 mm W)
Bottom feed with pull tractor option

Number Of Copies:

Five copies

Pin Feed:

Continuous, 9.5 in to 10.5 in wide
(241.3 mm to 266.7 mm wide)

Paper Thickness:

0.014 in (0.35 mm) maximum

Paper Path:

Bottom, rear or top

Paper Weight:

Cut sheet: 16 lb to 24 lb (7.2 kg to 10.8 kg),
Continuous: 16 lb to 20 lb (7.2 kg to 9.1 kg)

Electrical:

120 VAC: ±10%; 220/240 VAC: ±10%

Power Consumption:

Operating: 35 W
Idle: 7 W

Reliability (MTBF):

70,000 hours

Print Head Life:

200 million characters

Ribbon Type:

Black cartridge (2 million characters nominal life)

Operating Temperature:

40° F to 104° F (4° C to 40° C) at 25% to 80%
relative humidity

Overall Size:

(W x D x H): 14.2 x 10.8 x 3.2 in
(360.7 x 274.3 x 81.3 mm)

Est. Ship Weight:

10 lb (4.5 kg)

Warranty:

One-year limited warranty (includes print head)

* Print speeds apply to all pitches (10, 12, 17.1, and 20 cpi)

** Requires optional pull tractor (part #41224)