

Interchangeable Products

RICE LAKE WEIGHING SYSTEMS
AX3040
VPG REVERE®
8300420-10

Specifications

- Full Scale Output:**
0.5 mV/V at 12,500 lb
- Output Resistance:**
350 (nominal)
- Input Resistance:**
350 (nominal)
- Material/Finish:**
Alloy steel
- Temperature:**
14° F to 104° F (-10° C to 40° C)
- Rated Excitation:**
15 VDC
- Non-linearity:**
±1.0% full scale
- Insulation Resistance:**
500 megohms @ 50 VDC
- Seal Type:**
Environmentally sealed, IP66
- Connector Type:**
7-pin
- Connector Pin Out:**
A - Signal + (white)
C - Excitation - (black)
D - Excitation + (red)
F - Signal - (green)
F - Shield
- Warranty:**
One-year limited warranty







Order Information

Picture is a representation of actual product

Load Rating	Part #	Est. Weight	Price
Static 30,000 lbs	111766	30 lbs	Consult
Dynamic 20,000 lbs			

Load Cell Cable Option

Part #	Description	Price
112119	2 ft cable with 90° connector	Consult
112121	3 ft cable with connector	Consult
114628	10 ft cable with 90° connector	Consult
112120	17 ft cable with 90° connector	Consult

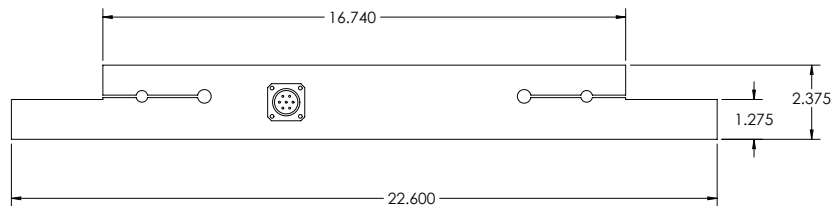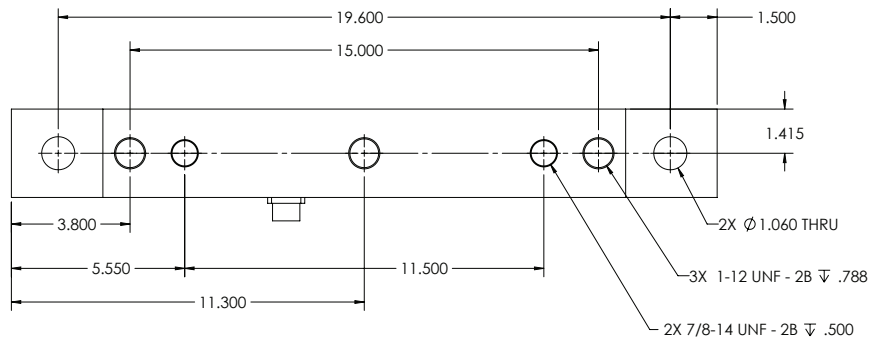

**ONBOARD WEIGHING
LOAD CELLS**