

LOAD CELL  
**PL9200-25K**

Stainless Steel, Hermetically Sealed, IP69

**Specifications**




- Full Scale Output:**  
2.0mV/V
- Output Resistance:**  
700 (nominal)
- Input Resistance:**  
736 (nominal)
- Material/Finish:**  
Stainless steel
- Temperature:**  
14° F to 104° F (-10° C to 40° C)
- Rated Excitation:**  
15 VDC (5-10 V recommended)
- Non-linearity:**  
±0.25% full scale
- Insulation Resistance:**  
5,000 mega ohms at 50 VDC
- Seal Type:**  
Hermetically sealed, IP69
- Cable Length:**  
25 ft
- Wire Color Code:**  
Red - Excitation +  
Green - Signal +  
Black - Excitation -  
White - Signal -  
Yellow - Shield
- Warranty:**  
One-year limited warranty



**Order Information**

*Picture is a representation of actual product*

Load Rating	Part #	Est. Weight	Price
25,000 lb	<b>209603</b>	25 lb	Consult
35,000 lb	<b>210812</b>	25 lb	Consult

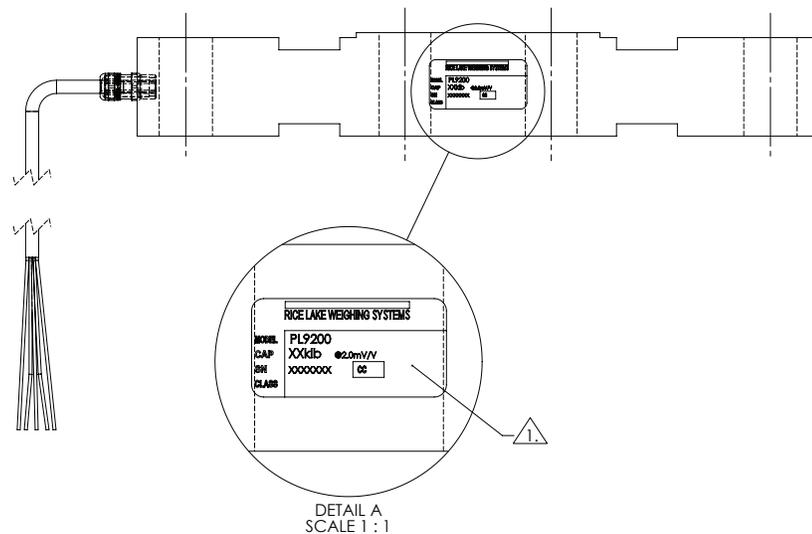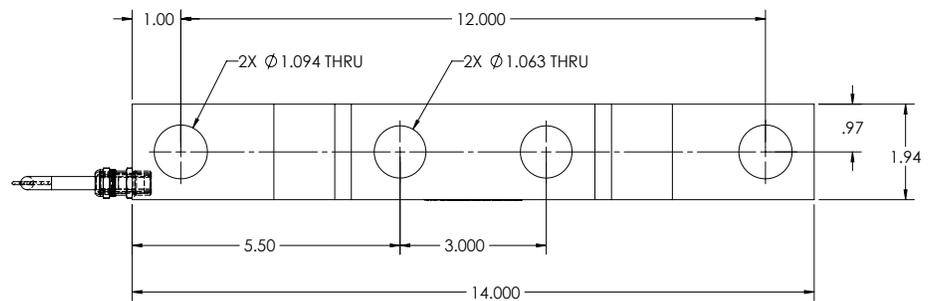

**ONBOARD WEIGHING  
LOAD CELLS**