

Specifications

Full Scale Output:
1.75 mV/V

Output Resistance:
722 (nominal)

Input Resistance:
700 (nominal)

Material/Finish:
Alloy steel

Temperature:
14° F to 104° F (-10° C to 40° C)

Rated Excitation:
15 VDC (5-10 V recommended)

Non-linearity:
±0.25% full scale

Insulation Resistance:
2,000 megohms at 50 VDC

Seal Type:
Environmentally sealed, IP66

Cable Length:
20 ft - PN 179827
50 ft - PN 191898

Wire Color Code:
Red - Excitation +
Green - Signal +
White - Signal -
Black - Excitation
Drain Wire - Shield



Warranty:
One-year limited warranty



Order Information

Picture is a representation of actual product

Load Rating		Part #	Est. Weight	Price
Static 25,000 lbs	Dynamic 10,000 lbs	179827	26 lb	Consult
Static 25,000 lbs	Dynamic 10,000 lbs	191898	26 lbs	Consult

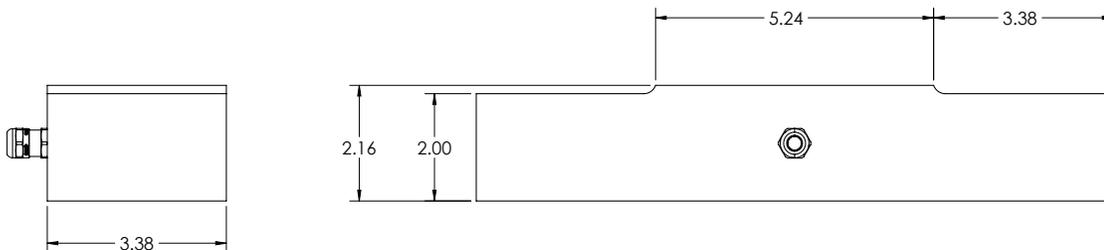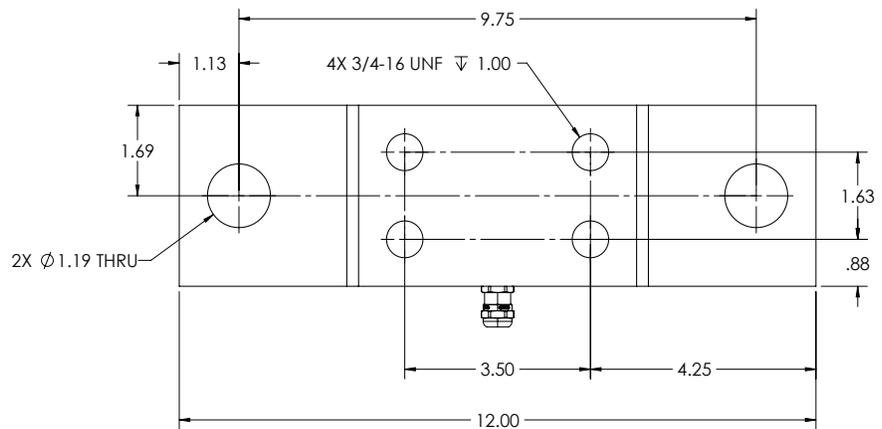

ONBOARD WEIGHING
LOAD CELLS