

Specifications

- Full Scale Output:**
0.75 mV/V at 12,500 lb
- Output Resistance:**
350 (nominal)
- Input Resistance:**
350 (nominal)
- Material/Finish:**
Alloy steel
- Temperature:**
14° F to 104° F (-10° C to 40° C)
- Rated Excitation:**
15 VDC (5-10 V recommended)
- Non-linearity:**
±0.1% full scale
- Insulation Resistance:**
5,000 megohms at 50 VDC
- Seal Type:**
Hermetically sealed, IP68
- Connector Type:**
Conxall, 4-pin (male)
- Connection Pin Out:**
 - A - Excitation +
 - B - Signal +
 - C - Signal -
 - D - Excitation -
- Warranty:**
One-year limited warranty




Order Information

Load Rating	Part #	Est. Weight	Price	
Static 40,000 lbs	Dynamic 20,000 lbs	117666	31 lb	Consult

Load Cell Cable Option

Part #	Description	Price
115954	30 ft cable with connector	Consult
166650	20 ft cable with connector	Consult

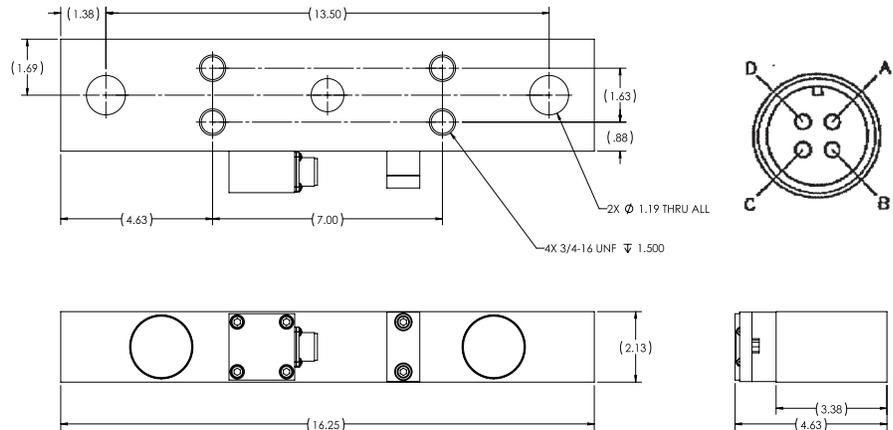

**ONBOARD WEIGHING
LOAD CELLS**