

Specifications

Full Scale Output:
1.75 mV/V

Output Resistance:
722 (nominal)

Input Resistance:
700 (nominal)

Material/Finish:
Alloy steel

Temperature:
-14° F to 104° F (-10° C to 40° C)

Rated Excitation:
15 VDC (5-10 V recommended)

Non-linearity:
±0.25% full scale


Insulation Resistance:
2,000 megohms at 50 VDC

Seal Type:
Environmentally sealed, IP66

Cable Length:
20 ft or 50 ft

Wire Color Code:
 Red - Excitation +
 Green - Signal +
 White - Signal -
 Black - Excitation
 Drain Wire - Shield




Warranty:
One-year limited warranty

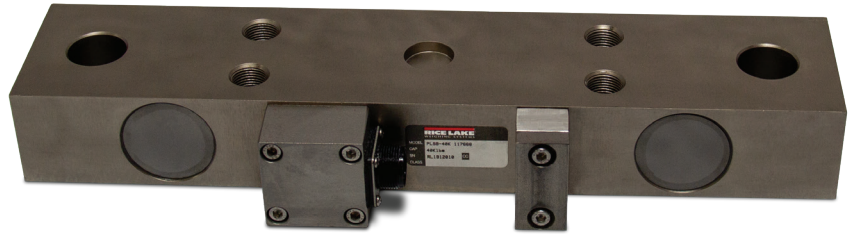

Order Information

Picture is a representation of actual product

Item #	Part #	Description	Qty.
1	117666	Load Cell, PLSB-40K Clamp	1
2	116436	Bearing Plate, 1x3.5x16.25	1
3	114256	Washer, Plain 1-1/8	2
4	114342	Bolt, 1-1/8 12UNF x 3-1/4	2

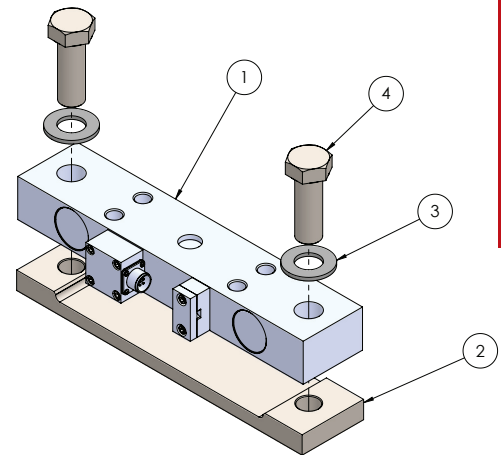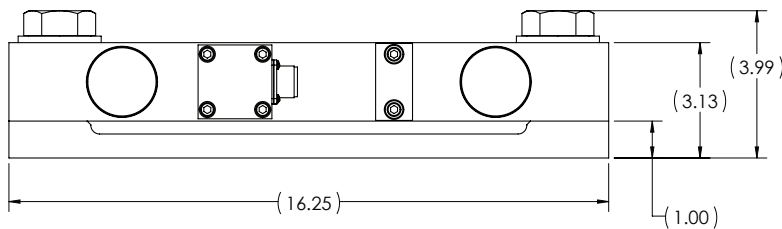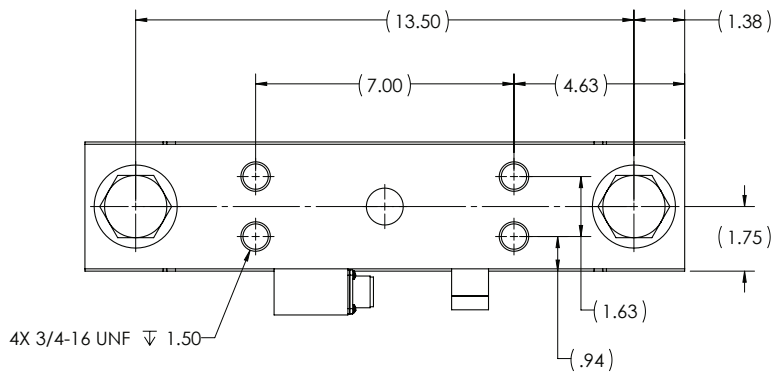

**ONBOARD WEIGHING
LOAD CELLS**