


# Profibus® DP Interface

720i™/920i®

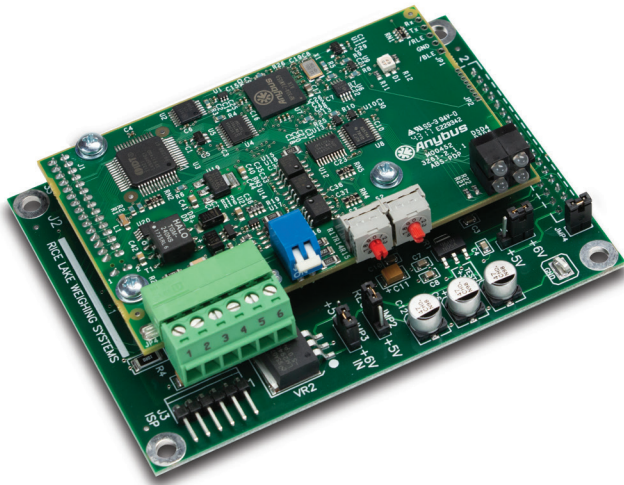

PN 68540

## Standard Features

- DP intelligent device
- Standard GSD file download from product page
- 128 selectable addresses
- Auto baud rate up to 56K
- Registered with Profibus Trade Organization
- Onboard diagnostic LEDs

## Specifications

**Power:**

5 VDC, 350 mA

**Fieldbus Interface:**

Pluggable screw connector

**Diagnostic LEDs:**

Module status and network status

**Dimensions:**

2.00 × 1.90 × 0.75 in  
(51.8 × 48 × 19 mm)

**Temperature Range:**

14 °F to 158 °F (-10 °C to 70 °C)

## Part Number/Price

Part #	Description	Est. Weight	Price
68540	Profibus DP interface kit (internal), for 720i/920i indicators	3 lb	Consult


## Options/Accessories

Part #	Description	Price
69948	Additional operating manual)	Consult

INDICATORS / CONTROLLERS

# Profinet® I/O Interface

920i®

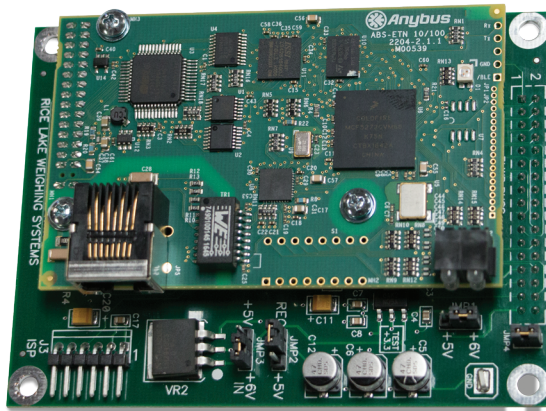

PN 187816

## Standard Features

- CE marked and UL conformance
- Onboard diagnostic LEDs
- Control protocols

## Specifications

**Power:**

5 VDC, 350 mA (jumper for 6 VDC)

**Fieldbus Interface:**

RJ-45

**Diagnostic LEDs:**

Link status and module status

**Dimensions:**

2.13 × 3.38 × 0.59 in  
(86 × 54 × 15 mm)

**Temperature Range:**

14 °F to 158 °F (-10 °C to 70 °C)

## Part Number/Price

Part #	Description	Price
187816	Profinet IO interface kit for 920i indicator	Consult

## Options/Accessories

Part #	Description	Price
187907	Additional operating manual	Consult