


Profibus® DP Interface

720i™/920i®

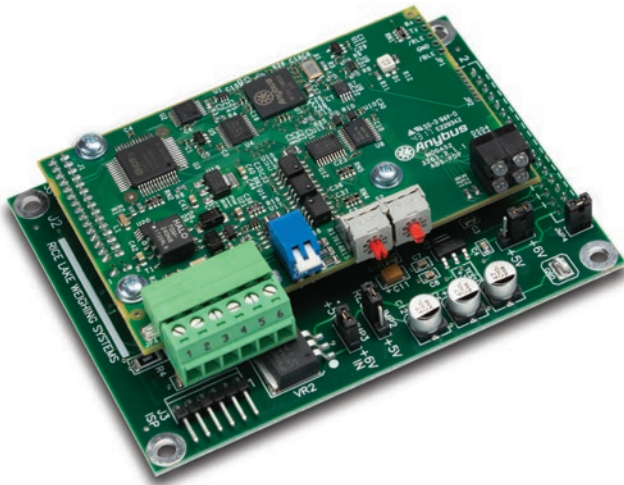

PN 68540

Standard Features

- DP intelligent device
- Standard GSD file download from product page
- 128 selectable addresses
- Auto baud rate up to 56K
- Registered with Profibus Trade Organization
- Onboard diagnostic LEDs

Specifications

- Power:**
5 VDC, 350 mA
- Fieldbus Interface:**
Pluggable screw connector
- Diagnostic LEDs:**
Module status and network status
- Dimensions:**
2.00 × 1.90 × 0.75 in
(51.8 × 48 × 19 mm)
- Temperature Range:**
14 °F to 158 °F (-10 °C to 70 °C)

Part Number/Price

Part #	Description	Est. Weight	Price
68540	Profibus DP interface kit (internal), for 720i/920i indicators	3 lb	Consult


Options/Accessories

Part #	Description	Price
69948	Additional operating manual)	Consult

INDICATORS / CONTROLLERS

Profinet® I/O Interface

920i®

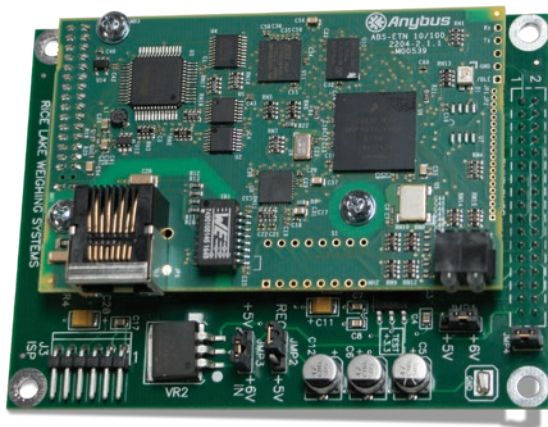

PN 187816

Standard Features

- CE marked and UL conformance
- Onboard diagnostic LEDs
- Control protocols

Specifications

- Power:**
5 VDC, 350 mA (jumper for 6 VDC)
- Fieldbus Interface:**
RJ-45
- Diagnostic LEDs:**
Link status and module status
- Dimensions:**
2.13 × 3.38 × 0.59 in
(86 × 54 × 15 mm)
- Temperature Range:**
14 °F to 158 °F (-10 °C to 70 °C)

Part Number/Price

Part #	Description	Price
187816	Profinet IO interface kit for 920i indicator	Consult

Options/Accessories

Part #	Description	Price
187907	Additional operating manual	Consult