



Picture is a representation of actual product

Pictured with integral foot for 250lb-2,000lb

Approvals



Order Information


Load Rating	Part #	Est. Weight	Price
NTEP Certified			
250 lb*	69380	3 lb	Consult
500 lb*	69381	3 lb	Consult
1,000 lb*	69382	3 lb	Consult
2,000 lb*	99314	3 lb	Consult
2,500 lb	69383	3 lb	Consult
4,000 lb	69384	3 lb	Consult
5,000 lb SE	69385	3 lb	Consult
5,000 lb LE	69386	8 lb	Consult
10,000 lb	69387	8 lb	Consult
15,000 lb	69388	8 lb	Consult
20,000 lb	69389	9 lb	Consult
Conduit Adapters (must be factory installed to maintain warranty)			
1/4-18 NPT	31534	1 lb	Consult

SE=small envelope; LE=large envelope

* Load cell has an integral foot

Dimensions

Rated Capacity	C	H	H1	L	L1	L2	L3	L4	T	W
lb/in										
250 to 5,000 SE	0.53	1.23	0.67	5.12	0.62	1.00	3.00	2.25	1/2-20 UNF	1.23
5,000 LE to 15,000	0.78	1.45	0.70	6.75	0.75	1.50	3.75	3.12	3/4-16 UNF	1.50
20,000	1.06	1.95	0.98	8.75	1.00	2.00	4.75	4.00	1-12 UNF	1.95

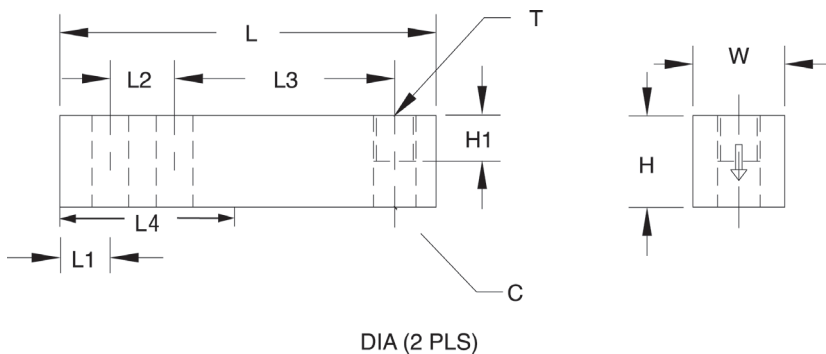

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL39123**page 115
- RICE LAKE WEIGHING SYSTEMS
RL32018Spage 106
- RICE LAKE WEIGHING SYSTEMS
RL32018S-HE.....page 108

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
RL50210TA.....page 41
- RICE LAKE WEIGHING SYSTEMS
RL1800 Series..... page 52

** Non-NTEP Certified

Specifications

- Full Scale Output:**
3.0 mV/V
- Output Resistance:**
350 (± 3.5) ohm
- Input Resistance:**
350 (± 3.5) ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Compensated:
0 °F to 150 °F (-18 °C to 65 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Safe Sideload:**
100% full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.02% full scale
- Non-repeatability:**
0.01% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
20 ft
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus
NTEP

