



Picture is a representation of actual product.

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
15 kg	17544	3 lb	Consult
30 kg	17545	3 lb	Consult
50 kg	17546	3 lb	Consult
75 kg	17547	3 lb	Consult
100 kg	17548	3 lb	Consult
150 kg	36467	3 lb	Consult

**Dimensions**

Rated Capacity	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
15 to 150	40.0	150.0	6.0	19.1	100.0	1/4-20 UNC × 10 DP	1/4-28 UNF × 10 DP	25.4	29.4

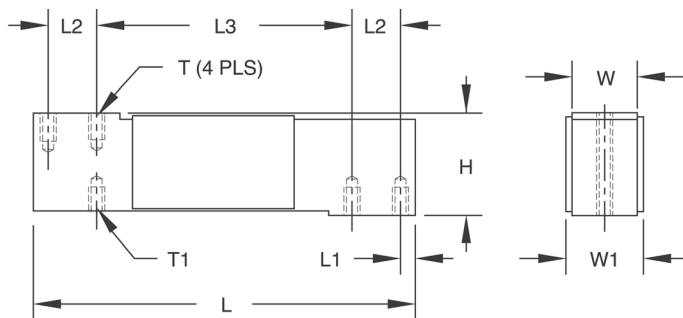

**Interchangeable Products**

VPG® TEDEA-HUNTLEIGH®  
1140.....page 316

**Specifications**

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
350 (± 5) ohm, nominal
- Input Resistance:**  
383 (± 15) ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Operating:  
14 ° F to 104 ° F (-10 ° C to 40 ° C)  
Compensated:  
14 ° F to 104 ° F (-10 ° C to 40 ° C)
- Seal Type:**  
Environmentally sealed, IP65
- Safe Overload:**  
200% at center loading point, full scale
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
2,000 megohm
- Deflection at Capacity:**  
0.4 mm
- Cable Length:**  
10 ft
- Cable Diameter:**  
0.200 in PVC jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal  
Blue +Sense  
Brown -Sense
- Max Platform Size:**  
15.75 × 15.75 in
- Warranty:**  
Two-year limited
- Approvals:**  
cFMus

**RICE LAKE  
LOAD CELLS**