



Picture is a representation of actual product.

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
250 kg	<b>31254</b>	2 lb	Consult
500 kg	<b>31255</b>	2 lb	Consult
1,000 kg	<b>31256</b>	2 lb	Consult
2,500 kg	<b>31257</b>	3 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E
kg/mm					
250 to 1,000	M12 × 1.75-6H	25.4	19.1	50.8	76.0
2,500	M20 × 1.5-6H	31.8	25.4	76.2	108.0

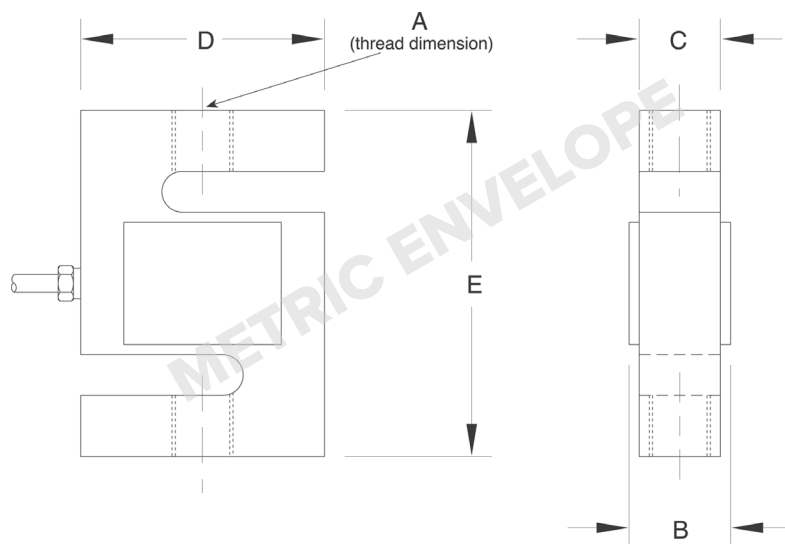

**Specifications**

- Full Scale Output:**  
3.0 mV/V ± 0.25%
- Bridge Resistance:**  
350 ohm, nominal
- Material/Finish:**  
Alloy steel
- Temperature:**  
Operating:  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% full scale
- Rated Excitation:**  
5 to 10 VAC/DC (15V maximum)
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
5,000 megohm
- Cable Length:**  
6 m
- Cable Diameter:**  
0.200 in  
Polyurethane jacket
- Cable Color Code:**  
Red +Excitation  
Black -Excitation  
Green +Signal  
White -Signal
- Warranty:**  
Two-year limited
- Approvals:**  
cFMus  
OIML R60/1991-GB-95-09

