


RoughDeck® HP and SS

Forklift Portability Frames

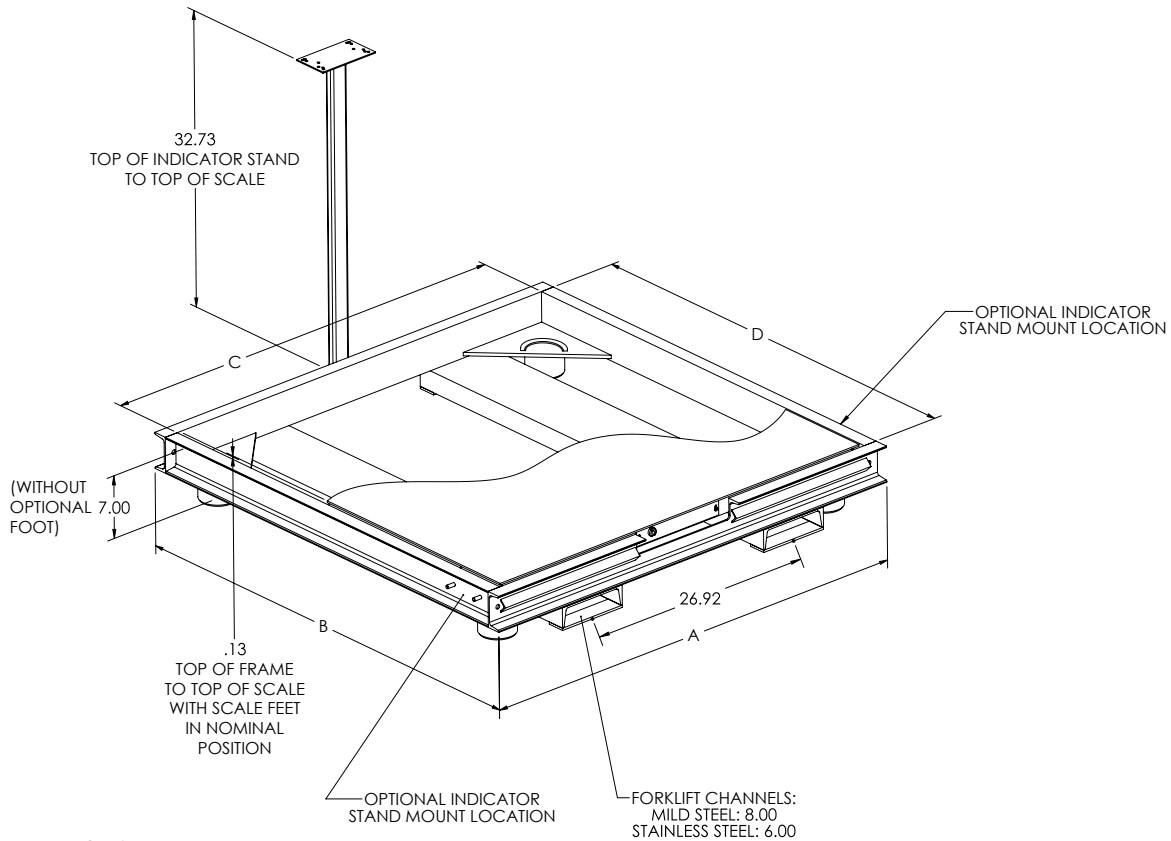

FLOOR SCALES

Part Number/Price

Part #	Size (W × L)	Est. Weight	Price
RoughDeck HP Portability Frames			
164492	4 ft × 4 ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	275 lb	Consult
164493	5 ft × 5 ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	400 lb	Consult
RoughDeck SS Portability Frames			
164494	4 ft × 4 ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	275 lb	Consult
164495	5 ft × 5 ft, up to 10,000 lb capacity, floor stand for indicator 36.3 in high, indicator stand mounting bracket	400 lb	Consult

NOTE: Indicator stand mount bracket works with 120/120 Plus, 882IS/882IS Plus, 882IS/882IS Plus w/battery, 880/880 Plus, 480/480 Plus, 482/482 Plus, 680 Synergy

NOTE: Consult factory if you intend on using with a pallet jack

Options

Part #	Size (L × W)	Est. Weight	Price
Options			
74574	SST, captured ball foot 3.00 in diameter 1/2-20 UNF thread with jam nut	3.0 lb	Consult

Dimensions

Portability Frame		
4 × 4 ft		
A	Mild steel: 51.92 in	Stainless steel: 52.75 in
B	Mild steel: 51.92 in	Stainless steel: 52.75 in
C	48.75 in	
D	48.75 in	
5 × 5 ft		
A	Mild steel: 63.92 in	Stainless steel: 64.75 in
B	Mild steel: 63.92 in	Stainless steel: 64.75 in
C	60.75 in	
D	60.75 in	
Distance from floor to inside of strap on the fork entry (without optional foot) (4 × 4 ft)		
	Mild steel: 3/4 in	Stainless steel: 1/2 in
Distance from inside of strap to top of the fork entry (without optional foot) (5 × 5 ft)		
	Mild steel: 2 in	Stainless steel: 2 1/4 in

Note: 1 in=25.4 mm