




Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
25 lb	61116	2 lb	Consult
50 lb	61117	2 lb	Consult
100 lb	61118	2 lb	Consult
200 lb	61119	2 lb	Consult
250 lb	61120	2 lb	Consult
300 lb	61121	2 lb	Consult
500 lb	61122	2 lb	Consult
750 lb	61123	2 lb	Consult
1,000 lb	61124	2 lb	Consult
1,500 lb	61125	2 lb	Consult
2,000 lb	61126	2 lb	Consult
2,500 lb	61127	2 lb	Consult
3,000 lb	61128	2 lb	Consult
5,000 lb	61129	4 lb	Consult
10,000 lb	61130	5 lb	Consult
15,000 lb	61131	7 lb	Consult
20,000 lb	61132	18 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E
lb/in					
25 to 200	1/4-28 UNF	0.65	0.50	2.00	2.50
250 to 300	3/8-24 UNF	0.75	0.50	2.00	3.00
500 to 2,000	1/2-20 UNF	1.00	0.75	2.00	3.00
2,500 to 3,000	1/2-20 UNF	1.25	1.00	2.00	3.00
5,000	3/4-16 UNF	1.25	1.00	3.00	4.25
10,000	3/4-16 UNF	1.25	1.00	3.50	4.75
15,000	1-14 UNS	1.50	1.25	4.00	5.50
20,000	1 1/4-12 UNF	2.25	2.00	5.00	7.00

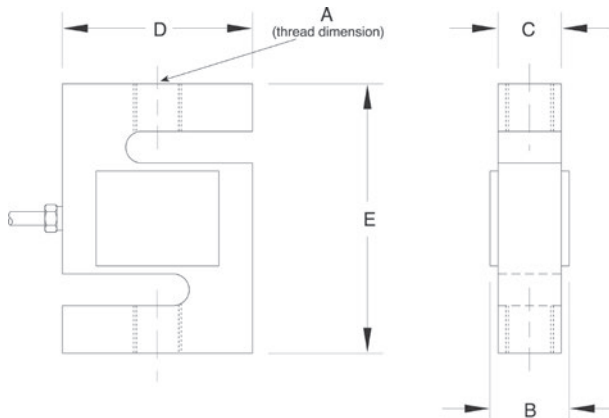

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL20001Ipage 109
- VPG® CELTRON
STC.....page 202

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
ITCM Isolated Tension Cell Mount.....page 40

Specifications

- Full Scale Output:**
3.0 mV/V
- Output Resistance:**
349 to 355 ohm
- Input Resistance:**
343 to 450 ohm
- Material/Finish:**
High-alloy steel, nickel plated
- Temperature:**
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 V DC (15 V maximum)
- Combined Error:**
0.03% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
20 ft
- Cable Diameter:**
0.200 in
Polyurethane jacket
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus
NTEP