



Picture is a representation of actual product

Approvals




Order Information

| Load Rating | Part # | Est. Weight | Price |
|-------------|--------|-------------|---------|
| 250 lb | 17077 | 2 lb | Consult |
| 500 lb | 17078 | 3 lb | Consult |
| 750 lb | 17079 | 3 lb | Consult |
| 1,000 lb | 17080 | 3 lb | Consult |
| 1,500 lb | 17081 | 3 lb | Consult |
| 2,000 lb | 17082 | 3 lb | Consult |
| 2,500 lb | 17083 | 3 lb | Consult |
| 3,000 lb | 17084 | 3 lb | Consult |
| 5,000 lb | 17085 | 4 lb | Consult |
| 10,000 lb | 17086 | 5 lb | Consult |
| 15,000 lb | 17087 | 8 lb | Consult |
| 20,000 lb | 17088 | 16 lb | Consult |

Dimensions

| Rated Capacity | A | B | C | D | E |
|----------------|--------------|------|------|------|------|
| lb/in | | | | | |
| 250 | 3/8-24 UNF | 0.75 | 0.50 | 2.00 | 3.00 |
| 500 to 1,500 | 1/2-20 UNF | 1.00 | 0.75 | 2.00 | 3.00 |
| 2,000 to 3,000 | 1/2-20 UNF | 1.25 | 1.00 | 2.00 | 3.00 |
| 5,000 | 3/4-16 UNF | 1.25 | 1.00 | 3.00 | 4.25 |
| 10,000 | 3/4-16 UNF | 1.25 | 1.00 | 3.50 | 4.75 |
| 15,000 | 1-14 UNS | 1.50 | 1.25 | 4.00 | 5.50 |
| 20,000 | 1 1/4-12 UNF | 2.00 | 1.94 | 5.00 | 7.00 |

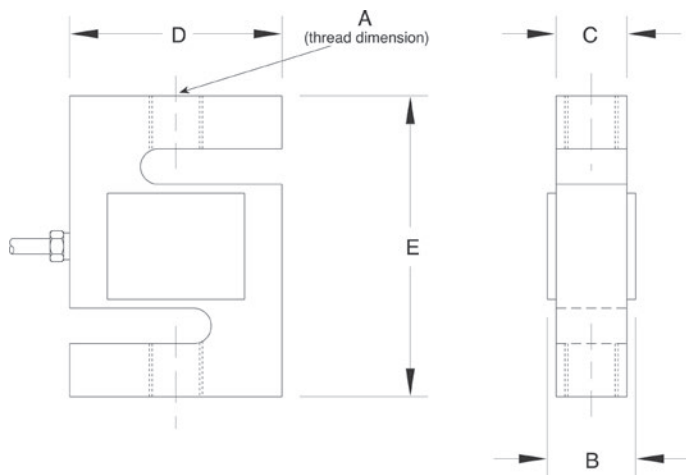

Interchangeable Products

VPG® CELTRON
STC SS..... page 203

Weigh Module Available

RICE LAKE WEIGHING SYSTEMS
ITCM Isolated Tension Cell Mount..... page 40

Specifications

- Full Scale Output:**
3.0 mV/V
- Output Resistance:**
349 to 355 ohm
- Input Resistance:**
343 to 450 ohm
- Material/Finish:**
Stainless steel
- Temperature:**
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP67
- Safe Overload:**
150% full scale
- Rated Excitation:**
5 to 10 V DC (15 V maximum)
- Nonlinearity:**
0.03% full scale
- Hysteresis:**
0.02% full scale
- Insulation Resistance:**
5,000 megohm
- Cable Length:**
20 ft
- Cable Diameter:**
0.200 in
Polyurethane jacket
- Cable Color Code:**
Red +Excitation
Black -Excitation
Green +Signal
White -Signal
- Warranty:**
One-year limited
- Approvals:**
cFMus