



Picture is a representation of actual product

Approvals




Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified			
20,000 lb	21592	7 lb	Consult
25,000 lb	21593	7 lb	Consult
40,000 lb	21608	13 lb	Consult
50,000 lb SE	26081	13 lb	Consult
50,000 lb LE	21594	21 lb	Consult
60,000 lb	21595	21 lb	Consult
75,000 lb	21596	21 lb	Consult
100,000 lb	21609	40 lb	Consult
125,000 lb	21610	40 lb	Consult
Non-NTEP Certified			
10,000 lb	17287	7 lb	Consult
60 ft cable			
75,000 lb	39459	26 lb	Consult

SE=small envelope; LE=large envelope

Dimensions

Rated Capacity	A	C	D	E	F	G	H	J	K	L
lb/in										
10,000 to 25,000	0.68	1.69	1.94	7.75	6.50	1.38	0.75	0.90	1.63	1.70
40,000 to 50,000 SE	0.81	1.94	2.44	10.25	8.50	1.93	1.00	1.12	2.00	2.10
50,000 LE to 75,000	1.06	2.44	2.94	10.25	8.50	1.93	1.00	1.37	2.54	2.65
100,000 to 125,000	1.62	2.90	3.86	15.25	12.75	3.13	1.50	1.80	3.30	3.43

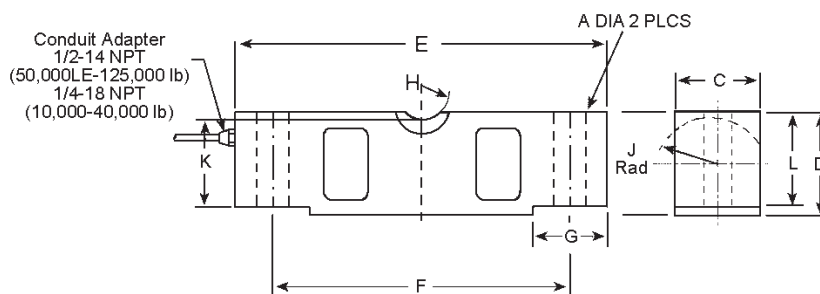

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL75058-LP page 139
- VPG® CELTRON®
CLB page 196

Weigh Module Available

- RICE LAKE WEIGHING SYSTEMS
RL2100 HE page 36
- RICE LAKE WEIGHING SYSTEMS
MVS page 77

Specifications

Full Scale Output:

3.0 mV/V

Output Resistance:

699 to 707 ohm

Input Resistance:

686 to 714 ohm

Material/Finish:

High-alloy steel, nickel plated

Temperature:

Compensated:

14 °F to 104 °F (-10 °C to 40 °C)

Operating:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP67

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5 to 10 VDC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

1,000 megohm

Cable Length:

35 ft

Cable Diameter:

10,000 to 25,000 lb: 0.200 in

40,000 to 125,000 lb: 0.305 in

Polyurethane jacket

Cable Coloring:

Red +Excitation

Black -Excitation

Green +Signal

White -Signal

Warranty:

One-year limited

Approvals:

cFMus

NTEP

VPG®
SENSORTRONICS®