

Picture is a representation of actual product

Approvals



Available upon request


Available upon request

Order Information

Load Rating	Part #	Est. Weight	Price
NTEP Certified, Potted			
10 kg	33719	2 lb	Consult
15 kg	33720	2 lb	Consult
20 kg	33721	2 lb	Consult
30 kg	33722	2 lb	Consult
50 kg	33723	2 lb	Consult
100 kg	33724	2 lb	Consult
Non-NTEP Certified, Potted			
5 kg	17449	2 lb	Consult
7 kg	17483	2 lb	Consult
NTEP Certified, Unpotted			
7 kg	33726	2 lb	Consult

Dimensions

Rated Capacity	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
5 to 100	40.0	150.0	6.0	19.1	100.0	1/4-20 UNC × 10 DP	1/4-28 UNF × 10 DP	25.4	29.4

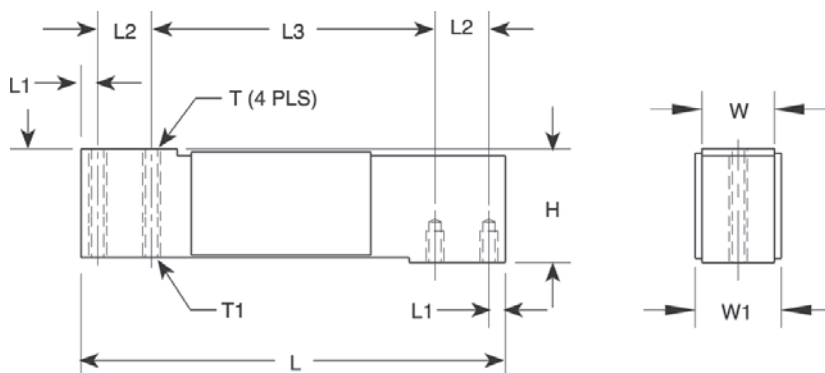

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL1040 page 174
- METTLER TOLEDO®
0785
- CARDINAL®
TSP

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
350 (± 3) ohm
- Input Resistance:**
415 (± 15) ohm
- Material/Finish:**
Anodized aluminum
- Temperature:**
Compensated range
14 °F to 104 °F (-10 °C to 40 °C)
Operating range
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP65
- Safe Overload:**
200% at center loading point, full scale
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.02% full scale
- Insulation Resistance:**
2,000 megohm
- Deflection at Capacity:**
0.015 in
- Cable Length:**
10 ft
- Cable Diameter:**
0.200 in PVC jacket
- Cable Color Code:**
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense
- Platform Size:**
15.75 × 15.75 in
- Warranty:**
One-year limited
- Approvals:**
cFMus
NTEP
Ex (Available upon request)
OIML (Available upon request)

VPG
TEDEA-HUNTLEIGH