



Picture is a representation of actual product

**Approvals**




**Order Information**

Load Rating	Part #	Est. Weight	Price
15 kg	17451	3 lb	Consult
30 kg	17452	3 lb	Consult
50 kg	17468	3 lb	Consult
75 kg	17485	3 lb	Consult
100 kg	17453	3 lb	Consult
150 kg	36466	3 lb	Consult

**Dimensions**

Rated Capacity	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
15 to 150	40.0	150.0	5.95	19.1	100.0	1/4-20 UNC × 10 DP	1/4-28 UNF × 10 DP	25.4	29.4

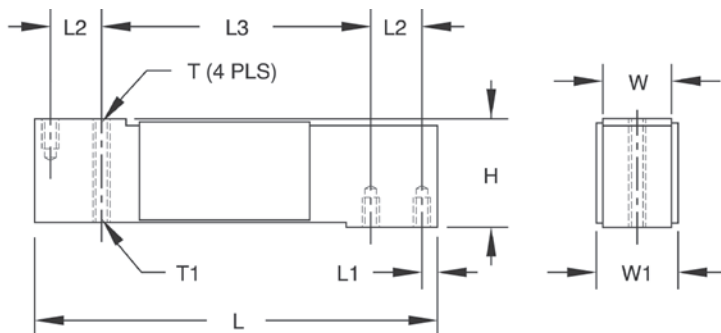

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS  
RL1140 ..... page 175

**Specifications**

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
385 (± 15) ohm
- Material/Finish:**  
Stainless steel
- Temperature:**  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% at center loading point, full scale
- Cable Diameter:**  
0.200 PVC jacket
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
2,000 megohm
- Deflection at Capacity:**  
0.015 in
- Cable Length:**  
10 ft
- Cable Diameter:**  
0.200 in PVC jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal  
Blue +Sense  
Brown -Sense
- Platform Size:**  
15.75 × 15.75 in
- Warranty:**  
One-year limited
- Approvals:**  
cFMus

**VPG  
TEDEA-HUNTLEIGH**