

Picture is a representation of actual product

**Approvals**



Available upon request


Available upon request

**Order Information**

Load Rating	Part #	Est. Weight	Price
50 kg	40769	5 lb	Consult
75 kg	40770	5 lb	Consult
100 kg	40771	5 lb	Consult
150 kg	159005	5 lb	Consult
200 kg	40772	5 lb	Consult
250 kg	40773	5 lb	Consult
300 kg	40774	5 lb	Consult
500 kg	40775	5 lb	Consult
635 kg	40776	5 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	C1	D	E	F	G	H
kg/mm									
50 to 635	188.0	52.0	35.0	142.0	5.5	62.3	50.0	5/16-18 UNC	62.3

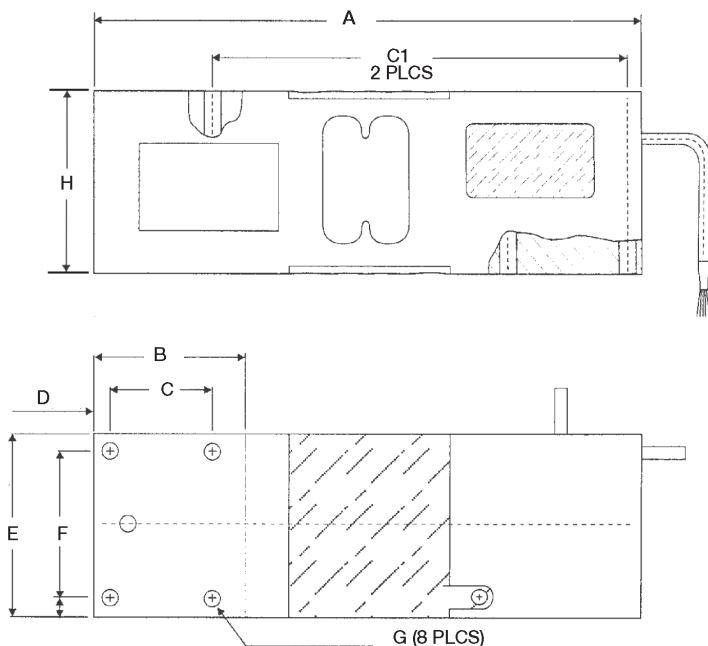

**Interchangeable Products**

- RICE LAKE WEIGHING SYSTEMS  
**RL1260**
- RICE LAKE WEIGHING SYSTEMS  
**RLPWM16**.....page 162
- VPG® TEDEA-HUNTLEIGH®  
**1260S**.....page 320

**Specifications**

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
415 (± 15) ohm
- Material/Finish:**  
Anodized aluminum
- Temperature:**  
Compensated:  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating:  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP67
- Safe Overload:**  
150% of full scale at center loading point
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
2,000 megohm
- Cable Length:**  
10 ft
- Cable Diameter:**  
0.220 in  
Polyurethane jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal  
Blue +Sense  
Brown -Sense
- Max Platform Size:**  
24 × 24 in
- Warranty:**  
One-year limited
- Approvals:**  
cFMus  
NTEP  
Ex (Available upon request)  
OIML (Available upon request)

**VPG®  
TEDEA-HUNTLEIGH®**