


SINGLE POINT
1260S

Aluminum, Environmentally Sealed, NTEP Certified 1:10,000 Class III Single Cell, IP66

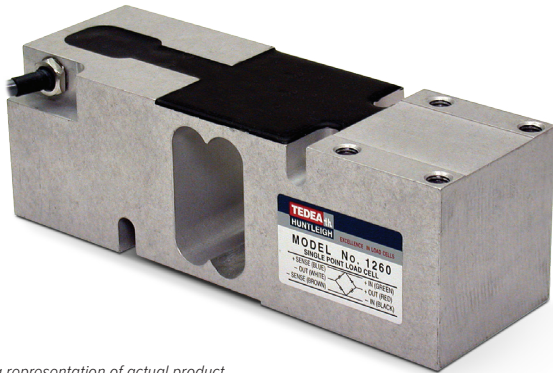

Picture is a representation of actual product

Approvals




Order Information


| Load Rating | Part # | Est. Weight | Price |
|-------------|--------|-------------|---------|
| 75 kg | 76395 | 5 lb | Consult |
| 100 kg | 76396 | 5 lb | Consult |
| 150 kg | 76397 | 5 lb | Consult |
| 200 kg | 76398 | 5 lb | Consult |
| 250 kg | 76399 | 5 lb | Consult |
| 500 kg | 76401 | 5 lb | Consult |
| 635 kg | 76402 | 5 lb | Consult |

Dimensions

| Rated Capacity | A | B | C | D | E | F | G | H | I | J | K | L | M |
|----------------|------|------|------|------|------|------|------|------|------|-------|------|-----|-------|
| kg/mm | | | | | | | | | | | | | |
| 75 to 635 | 52.0 | 16.0 | 62.3 | 52.0 | 16.0 | 52.3 | 63.0 | 50.0 | 35.0 | 107.0 | 35.0 | 5.5 | 188.0 |

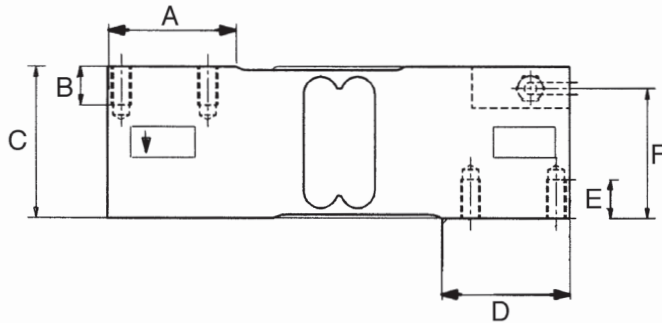

5/16-18 UNC-2b (8pls)

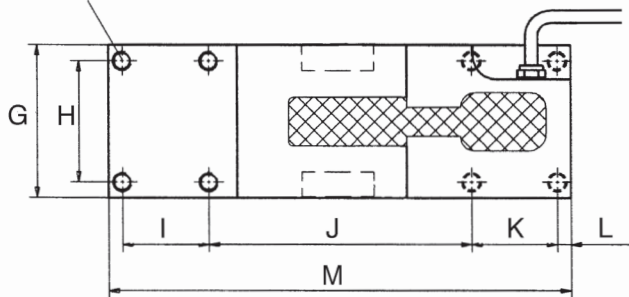

Interchangeable Products

- RICE LAKE WEIGHING SYSTEMS
RL1260
- RICE LAKE WEIGHING SYSTEMS
RL26018A.....page 169
- VPG® TEDEA-HUNTLEIGH®
1260page 319

Specifications

- Full Scale Output:**
2.0 mV/V
- Output Resistance:**
350 (± 3) ohm
- Input Resistance:**
415 (± 15) ohm
- Material/Finish:**
Anodized aluminum
- Temperature:**
Compensated:
14 °F to 104 °F (-10 °C to 40 °C)
Operating:
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**
Environmentally sealed, IP66
- Safe Overload:**
150% of full scale at center loading point
- Rated Excitation:**
5 to 10 VDC (15 V maximum)
- Combined Error:**
0.02% full scale
- Insulation Resistance:**
2,000 megohm
- Cable Length:**
10 ft
- Cable Diameter:**
0.220 in
Polyurethane jacket
- Cable Color Code:**
Green +Excitation
Black -Excitation
Red +Signal
White -Signal
Blue +Sense
Brown -Sense
- Max Platform Size:**
24 × 24 in
- Warranty:**
One-year limited
- Approvals:**
cFMus
NTEP