



Picture is a representation of actual product

**Approvals**




**Order Information**


Load Rating	Part #	Est. Weight	Price
75 kg	<b>76395</b>	5 lb	Consult
100 kg	<b>76396</b>	5 lb	Consult
150 kg	<b>76397</b>	5 lb	Consult
200 kg	<b>76398</b>	5 lb	Consult
250 kg	<b>76399</b>	5 lb	Consult
500 kg	<b>76401</b>	5 lb	Consult
635 kg	<b>76402</b>	5 lb	Consult

**Dimensions**

Rated Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M
kg/mm													
75 to 635	52.0	16.0	62.3	52.0	16.0	52.3	63.0	50.0	35.0	107.0	35.0	5.5	188.0

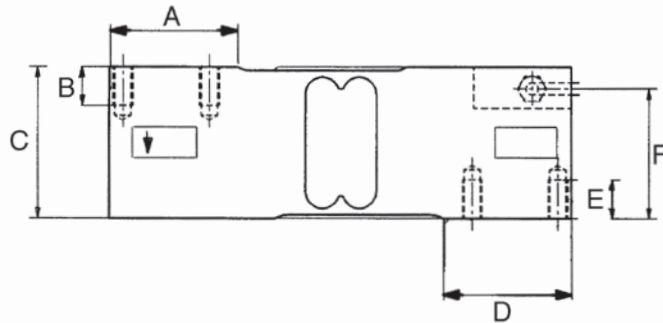

5/16-18 UNC-2b (8pls)

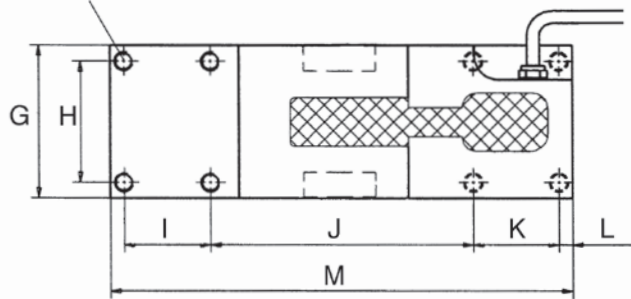

**Interchangeable Products**

- RICE LAKE WEIGHING SYSTEMS  
**RL1260** ..... page 178
- RICE LAKE WEIGHING SYSTEMS  
**RL26018A**.....page 180
- VPG® TEDEA-HUNTLEIGH  
**1260** ..... page 334

**Specifications**

- Full Scale Output:**  
2.0 mV/V
- Output Resistance:**  
350 (± 3) ohm
- Input Resistance:**  
415 (± 15) ohm
- Material/Finish:**  
Anodized aluminum
- Temperature:**  
Compensated range  
14 °F to 104 °F (-10 °C to 40 °C)  
Operating range  
0 °F to 150 °F (-18 °C to 65 °C)
- Seal Type:**  
Environmentally sealed, IP66
- Safe Overload:**  
150% of full scale at center loading point
- Rated Excitation:**  
5 to 10 VDC (15 V maximum)
- Combined Error:**  
0.02% full scale
- Insulation Resistance:**  
2,000 megohm
- Cable Length:**  
10 ft
- Cable Diameter:**  
0.220 in  
Polyurethane jacket
- Cable Color Code:**  
Green +Excitation  
Black -Excitation  
Red +Signal  
White -Signal  
Blue +Sense  
Brown -Sense
- Max Platform Size:**  
24 × 24 in
- Warranty:**  
One-year limited
- Approvals:**  
cFMus  
NTEP

**VPG  
TEDEA-HUNTLEIGH**