



Picture is a representation of actual product

Approvals






Available upon request

Order Information

Load Rating	Part #	Est. Weight	Price
50 kg	157478	5 lb	Consult
100 kg	157479	5 lb	Consult
150 kg	157480	5 lb	Consult
200 kg	157481	5 lb	Consult
250 kg	157482	5 lb	Consult
300 kg	157483	5 lb	Consult
500 kg	157484	5 lb	Consult
635 kg	157485	5 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I
kg/mm									
50 to 635 kg	174.0	122.0	60.0	62.5	43.0	19.0	30.0	7.0	M8-6

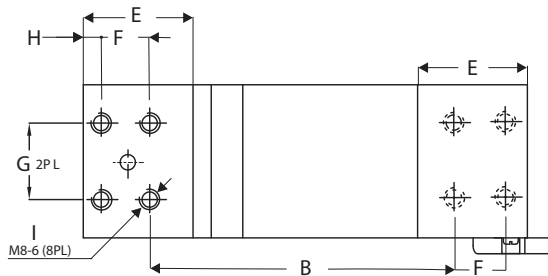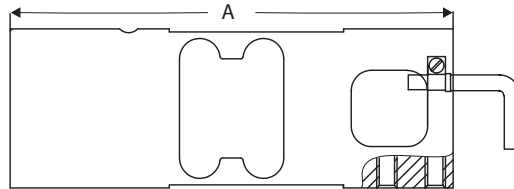

Interchangeable Products

TRANSCCELL®
FAV

Specifications

Full Scale Output:
2 mV/V

Output Resistance:
350 (± 3) ohm

Input Resistance:
415 (± 15) ohm

Material/Finish:
Anodized aluminum

Temperature:
Operating:
0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:
Environmentally sealed, IP66

Safe Overload:
150% of rated output

Rated Excitation:
10 VAC (15 V maximum)

Insulation Resistance:
2,000 megohm

Cable Length:
1.5 m

Cable Diameter:
0.200 in
PVC jacket

Cable Color Code:
Green +Excitation
Black -Excitation
Red +Signal
White -Signal

Max Platform Size:
24 × 24 in

Warranty:
One-year limited

Approvals:
OIML
Ex (Available upon request)

VPG®
TEDEA-HUNTLEIGH®