



Picture is a representation of actual product

Approvals






Available upon request

Order Information

Load Rating	Part #	Est. Weight	Price
50 kg	157478	5 lb	Consult
100 kg	157479	5 lb	Consult
150 kg	157480	5 lb	Consult
200 kg	157481	5 lb	Consult
250 kg	157482	5 lb	Consult
300 kg	157483	5 lb	Consult
500 kg	157484	5 lb	Consult
635 kg	157485	5 lb	Consult

Dimensions

Rated Capacity	A	B	C	D	E	F	G	H	I
kg/mm									
50 to 635 kg	174.0	122.0	60.0	62.5	43.0	19.0	30.0	7.0	M8-6

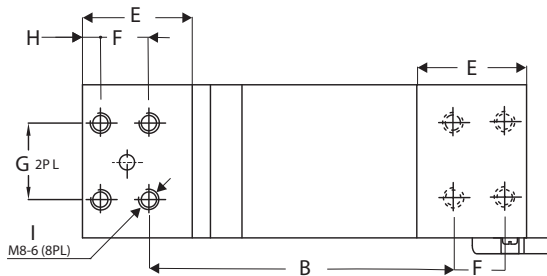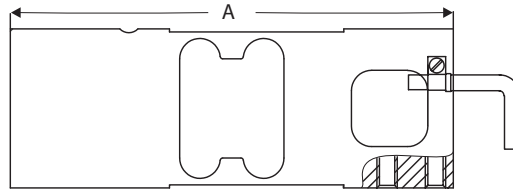

Interchangeable Products

TRANSCELL®
FAV

Specifications

Full Scale Output:

2 mV/V

Output Resistance:

350 (± 3) ohm

Input Resistance:

415 (± 15) ohm

Material/Finish:

Anodized aluminum

Temperature:

Operating range:

0 °F to 150 °F (-18 °C to 65 °C)

Seal Type:

Environmentally sealed, IP66

Safe Overload:

150% of rated output

Rated Excitation:

10 VAC (15 V maximum)

Combined Error:

0.02% full scale

Insulation Resistance:

2,000 megohm

Cable Length:

1.5 m

Cable Diameter:

0.200 in

PVC jacket

Cable Color Code:

Green +Excitation

Black -Excitation

Red +Signal

White -Signal

Max Platform Size:

24 × 24 in

Warranty:

One-year limited

Approvals:

OIML

Ex (Available upon request)