

DeckHand[®]

PORTABLE FLOOR SCALE



RICE LAKE[®]
WEIGHING SYSTEMS

800-472-6703

www.ricelake.com

DeckHand®

PORTABLE FLOOR SCALE

The handy DeckHand® weighs and rolls anywhere

Move the DeckHand to any part of a facility and be instantly ready to weigh accurately. The platform is designed to weigh perfectly on all corners. Off-center product loading will not affect weighing accuracy.

DeckHand wheels only touch the floor when the unit is tilted back for movement allowing the weighing platform to remain stable on uneven floors.

Partner this scale with one of Rice Lake's battery-operated indicators like the 380 Synergy Series.

All models on this page are shown with optional indicators.

Mild Steel with aluminum environmentally sealed load cells

Size (W x L x H)	Capacity
31 x 41 x 4.5 in (787 x 1041 x 114 mm)	500 lb (250 kg)
31 x 41 x 4.5 in (787 x 1041 x 114 mm)	1000 lb (500 kg)
31 x 41 x 4.5 in (787 x 1041 x 114 mm)	2000 lb (1000 kg)


Stainless Steel with aluminum environmentally sealed load cells

Size (W x L x H)	Capacity
31 x 41 x 4.5 in (787 x 1041 x 114 mm)	500 lb (250 kg)
31 x 41 x 4.5 in (787 x 1041 x 114 mm)	1000 lb (500 kg)
31 x 41 x 4.5 in (787 x 1041 x 114 mm)	2000 lb (1000 kg)

Installation Options Add Versatility...

- Indicator floor stand
- Digital weight indicators
- Anchor plates
- Access ramps

All installation options are available in mild or stainless steel.

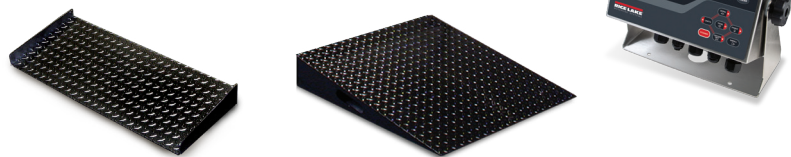

STANDARD FEATURES

- Mild or stainless steel wheeled frame, base and mast
- Diamond tread top plate, mild or stainless steel
- Large rubber wheels (not rated for IS) simplify movement on uneven floors
- Two IP67 aluminum load cells
- Standard indicator mount with integral handles for the 480/480 Plus, 482/482 Plus, 880/880 Plus and 680 Synergy

OPTIONS/ACCESSORIES

- Clam shell for additional load cell protection
- Ramp

APPROVALS



NTEP CC 98-004
Class III 2,500 D



AM-5218

WARRANTY

- Weldment: Five-year
- Load cells: Two-year
- All other components: One-year



SALES AND TECHNICAL ASSISTANCE

RICE LAKE®
WEIGHING SYSTEMS

HEADQUARTERS
230 West Coleman Street
Rice Lake, Wisconsin 54868 - USA
Tel: (715) 234 9171 | Fax: (715) 234 6967
www.ricelake.com