

1280 Kiosk/OnTrak Enterprise

Software

Operation Manual



RICE LAKE[®]
WEIGHING SYSTEMS

© Rice Lake Weighing Systems. All rights reserved.

Rice Lake Weighing Systems® is a registered trademark of
Rice Lake Weighing Systems.

All other brand or product names within this publication are trademarks or
registered trademarks of their respective companies.

All information contained within this publication is, to the best of our knowledge, complete and
accurate at the time of publication. Rice Lake Weighing Systems reserves the right to make
changes to the technology, features, specifications and design of the equipment without notice.

The most current version of this publication, software, firmware and all other product
updates can be found on our website:

www.ricelake.com

Revision History

This section tracks and describes manual revisions for awareness of major updates.

Revision	Date	Description
A	April 25, 2023	Initial manual release with product launch;

Table i. Revision Letter History



Technical training seminars are available through Rice Lake Weighing Systems. Course descriptions and dates can be viewed at www.ricelake.com/training or obtained by calling 715-234-9171 and asking for the training department.

Contents

1.0 Overview	5
1.1 Overview	5
1.2 Safety	5
2.0 Truck Processing	6
3.0 Setup Information	11
3.1 Serial Communications – Tickets, PC.....	11
3.1.1 Header (AuxFmt1)	11
3.1.2 Footer (AuxFmt2).....	11
3.1.3 Rice Lake Stop /Go Green Light (AuxFmt19)	11
3.1.4 Rice Lake Stop /Go Red Light (AuxFmt20)	11
3.2 Database Tables	11
3.3 Application Configuration	12
3.4 Hardware Specifications	13



Rice Lake continually offers web-based video training on a growing selection of product-related topics at no cost. Visit www.ricelake.com/webinars

1.0 Overview

1.1 Overview

The 1280 OnTrak unattended kiosk iRite program is supported by the OnTrak Enterprise Truck Weighing application and communicates with the OnTrak Enterprise PC program for all required information.

1.2 Safety

Safety Definitions:



DANGER: Indicates an imminently hazardous situation that, if not avoided, will result in death or serious injury. Includes hazards that are exposed when guards are removed.



WARNING: Indicates a potentially hazardous situation that, if not avoided, could result in serious injury or death. Includes hazards that are exposed when guards are removed.



CAUTION: Indicates a potentially hazardous situation that, if not avoided, could result in minor or moderate injury.



IMPORTANT: Indicates information about procedures that, if not observed, could result in damage to equipment or corruption to and loss of data.

General Safety



Do not operate or work on this equipment unless this manual has been read and all instructions are understood. Failure to follow the instructions or heed the warnings could result in injury or death. Contact any Rice Lake Weighing Systems dealer for replacement manuals.



WARNING

Failure to heed could result in serious injury or death.

Do not allow minors (children) or inexperienced persons to operate this unit.

Do not use for purposes other than weight measurement.

Do not place fingers into slots or possible pinch points.

Do not use any load-bearing component that is worn beyond 5% of the original dimension.

Do not use this product if any of the components are cracked.

Do not make alterations or modifications to the unit.

Do not exceed the rated load limit of the unit.

Do not remove or obscure warning labels.

Keep hands, feet and loose clothing away from moving parts.

Do not operate without all shields and guards in place.

Do not impede vehicle traffic.

Drive cautiously while being aware of surroundings and people.

2.0 Truck Processing

The following instructions detail truck processing with a 1280 Enterprise™ Series Programmable Weight Indicator and Controller in an unattended kiosk running OnTrak™ Enterprise software.

1. Drive truck to the scale and performs one of the following based on the **Loop Detector** setting:
 - A. Loop detectors are disabled and scale is empty with a zero and a **green** traffic light displayed on the 1280, proceed to [Step 2](#).
 - B. Loop detectors are enabled and scale is empty with a zero and a **red** traffic light displayed on the 1280:
 - i. *Waiting on Loop Detector* displays.
 - ii. Drive truck to loop detector.
 - iii. Loop detector activates and the system attempts to zero the scale. If successful or at zero, the system displays Enter Scale and a **green** traffic light.

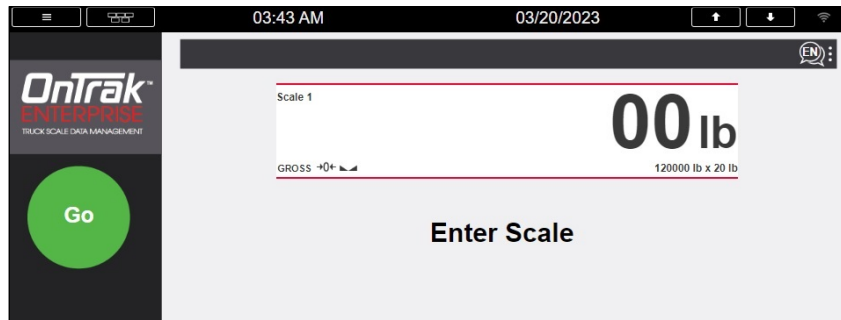


Figure 2-1. Enter Scale Message

2. Drive the truck onto the scale and exceed the configurable **Threshold** weight.
3. (Optional) Select the language button to cycle through available languages (English, French and Spanish).



NOTE: All translations are configurable in the Language database. After downloading a user program the Language database must be imported using Revolution. If the system displays Language DB Error in the lower left corner, the language database was not imported successfully.

See 1280 Enterprise™ Series Technical Manual (PN 167659) for information regarding how to import a database.



Figure 2-2. Language Selection Button

4. The 1280 validates the Scale Name:
 - A. Proceed to [Step 5](#) if the scale message does not display *Please Configure a Scale Name – Exit Scale*.
 - B. Perform the following if the scale message displays *Please Configure a Scale Name – Exit Scale*:
 - i. The driver must exit the scale and the attendant must access the 1280 Setup Menu and configure a Scale Name.
 - ii. The attendant selects **Scale Name**, the 1280 displays a list of Scale Names.
 - iii. The attendant selects the required **Scale Name** and the 1280 is ready to process trucks.

5. If RF the tag reader is set as *SmartPass* in the Setup Menu, enable *SmartPass* output activates and the traffic light turns **red** while the 1280 displays *Scan RFID or Enter Truck ID*. Perform one of the following:
 - A. The RFID (radio frequency identification) was scanned as the truck entered the scale.
 - B. Scan the RFID.
 - C. Select **Enter Truck ID**, enter the Truck ID followed by **DONE**.

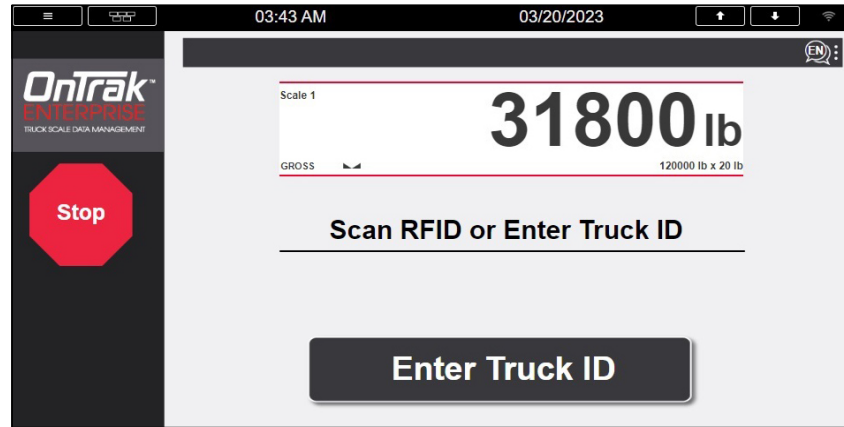


Figure 2-3. Scan RFID or Enter Truck ID Prompt

6. The 1280 validates the gross weight against the minimum and maximum weights (configured in OnTrak Enterprise).
 - A. If the gross weight is less than ($<$) the configured minimum truck weight, the system displays *Truck Underweight*:
 - Select **Accept** and proceed to [Step 7](#).
 - Select **Cancel**. *Exit Scale* and a **green** traffic light display.
 - B. If the gross weight is greater than or equal to (\geq) the Maximum Truck Weight, the system displays *Truck Overweight*:
 - Select **Accept** to proceed to [Step 7](#).
 - Select **Cancel**. *Exit Scale* and a **green** traffic light display.

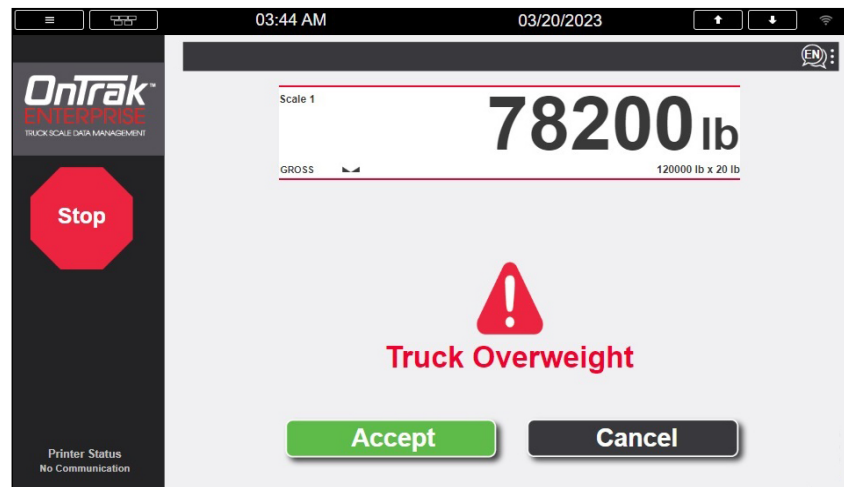


Figure 2-4. Truck Overweight Prompt

7. Depending on tare type the 1280 performs one the following:
 - A. If **Keyed Tare Weight** or **Stored Tare Weight** is less than (>) 0, proceed to [Step 8](#) (Outbound Transaction).
 - B. If **Keyed Tare Weight** or **Stored Tare Weight** is 0, *Invalid Truck Tare* and a **green** traffic light displays.
 - C. Weighs the truck:
 - The 1280 sends truck inbound data to OnTrak Enterprise. Proceed to [Step 9](#).
 - Inbound data not found, proceed to [Step 8](#) (Outbound Transaction).
8. 1280 displays select **Shipping** and **Receiving** buttons. The driver selects **Shipping** or **Receiving** and the 1280 sends the information to OnTrak Enterprise.

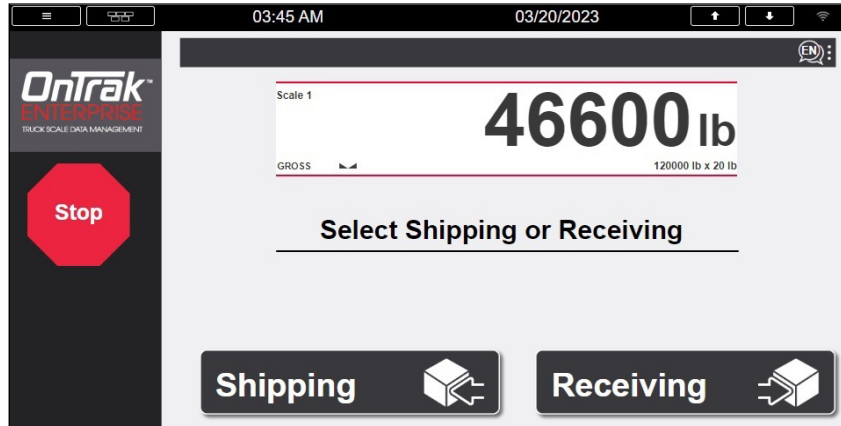


Figure 2-5. Shipping or Receiving Prompt



NOTE: Shipping and Receiving text is configurable in Setup.

9. The 1280 displays the Job screen with three options:
 - A. **Select Default/Inbound Job**, activate to initiate the *Default/Inbound Job*.
 - B. **Request Job List**, select to view all *Jobs* from OnTrak Enterprise then select one.
 - C. **Continue with No Job**, select to advance without a job. Proceed to [Step 10](#).

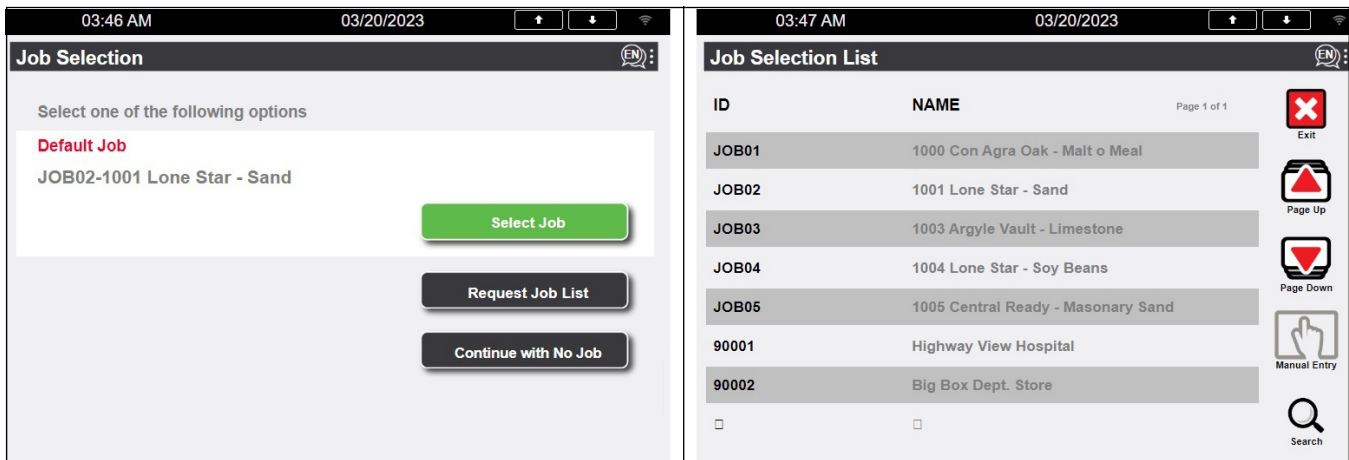



Figure 2-6. Job Selection Prompt and List

10. The 1280 displays the Customer or Vendor screen with three options:
 - A. **Select Default/Inbound Customer/Vendor**, activate to initiate the *Default/Inbound Customer/Vendor*.
 - B. **Request Customer/Vendor List**, select to view all *Customer/Vendors* from OnTrak Enterprise then select one.
 - C. **Continue with No Customer/Vendor**, select to advance without a customer/vendor. Proceed to [Step 11](#).
 11. The 1280 displays the Product screen with three options:
 - A. **Select default/Inbound Product**, activate to initiate the *Default/Inbound Product*.
 - B. **Request Product List**, select to view all *Products* from OnTrak Enterprise then select one.
 - C. **Continue with No Product**, select to advance without a product. Proceed to [Step 12](#).
 12. (Optional) Custom user prompts (1 - 3) configured in OnTrak Enterprise display, if required enter data and select **DONE** button in each prompt.
-  **NOTE: User Fields only appear if enabled in OnTrak Enterprise. See OnTrak Enterprise Technical Manual (PN 216813) for more information.**
13. The system displays all configured information, select **Accept** to proceed ([Step 14](#)) or **Cancel** to restart the procedure ([Step 1](#)).

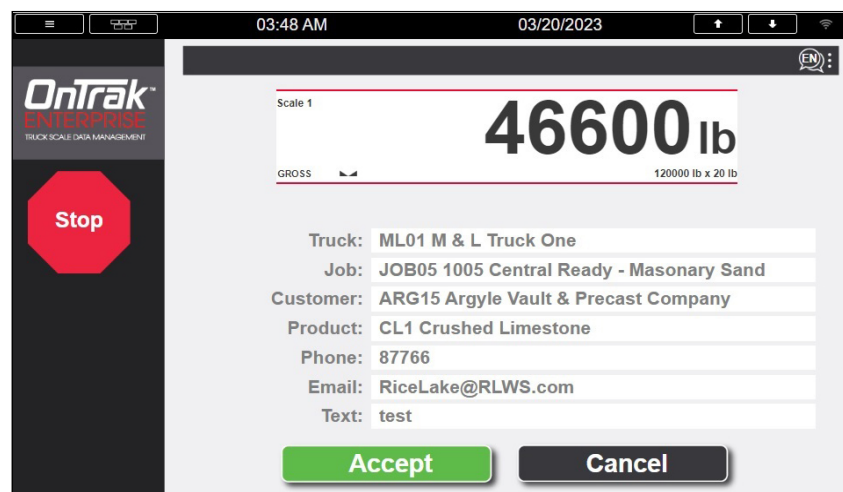


Figure 2-7. Accept Information Prompt



14. The system captures data, calculates weights, stores the transaction in the OnTrak Enterprise database and then prints the ticket.
-  **NOTE: The ticket footer and header can be edited from the kiosk (Auxfmt1 and Auxfmt 2).**
15. (Optional) Press the ticket reprint button to reprint the ticket.



Figure 2-8. Reprint Ticket Button

 **NOTE: If connection between the kiosk and the Custom America printer is lost, the 1280 displays No Communication. If the printer reports an error, the 1280 may display No Communication, Out of Paper, Online, or Low Paper. These errors do not prevent completing a transaction. However, if the printer is off-line or out of paper, the driver must request a reprinted ticket from the attendant.**

The Reprint option is available if a ticket was printed at the kiosk until the truck exits the scale.

16. The 1280 displays *Weighment Complete - Exit scale*.

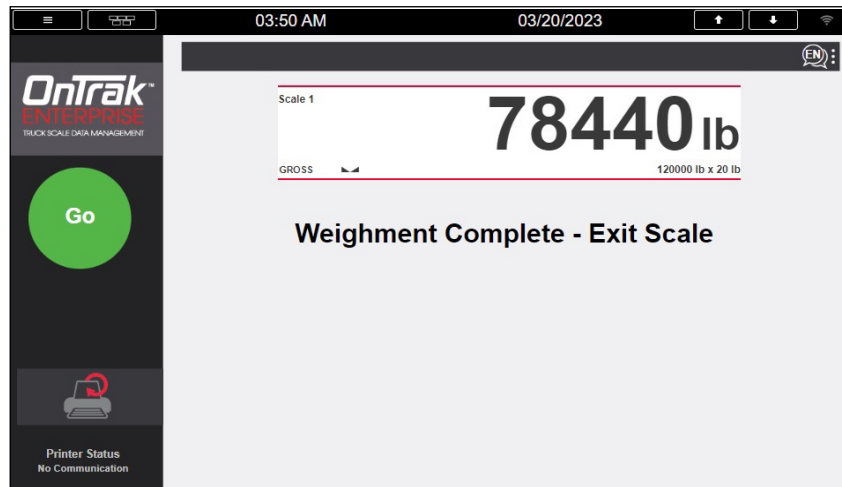


Figure 2-9. Accept Information Prompt

17. 1280 does one of the following based on the **Loop Detector** setting once the scale weight drops below **Threshold**.
- A. If loop detectors are disabled, wait until traffic light turns **green** then exit the scale.
 - B. If loop detectors are inverted or normal, *Exit Loop Delay* displays until the timer expires. Turns traffic light **red**. Return to [Step 1](#).

3.0 Setup Information

3.1 Serial Communications – Tickets, PC

This application does not utilize tickets or reports. All ticket formats and report printing is handled by OnTrak Enterprise PC excluding the Footer and Header when printing at the Kiosk.

3.1.1 Header (AuxFmt1)

The message will be transmitted (default port 2). The format can be modified through the 1280 front panel or with the Revolution® scale software. This format includes special control characters before printing. For example, double high, double wide, font, etc.

3.1.2 Footer (AuxFmt2)

The message will be transmitted (default port 2). The format can be modified through the 1280 front panel or with the Revolution scale software. This format includes special control characters after printing. For example, cut, release, etc.

3.1.3 Rice Lake Stop /Go Green Light (AuxFmt19)

The message will be transmitted (default port 7). The format can be modified through the 1280 front panel or with the Revolution scale software.

3.1.4 Rice Lake Stop /Go Red Light (AuxFmt20)

The message will be transmitted (default port 7). The format can be modified through the 1280 front panel or with the Revolution scale software.

3.2 Database Tables

All database information is maintained in the SQL Server Database on the OnTrak Enterprise PC except for the Language translations.

Field	Type	Description
Nbr	Integer	Text string number
PriLan	String	Prompt in language (English by default)
SecLan	String	Prompt in language (Spanish by default)
TerLan	String	Prompt in language (French by default)

Table 3-1. LANGUAGE Database Table - 200 Records

3.3 Application Configuration

The **Setup** touch widget is password-protected and offers access to the following:

- Display Program Name and Version
- Display weight widget
- Streams Remote Display Command format (|<AA><CC>|<Data>!) out port 7 (Remote Display) for calibration and troubleshooting.

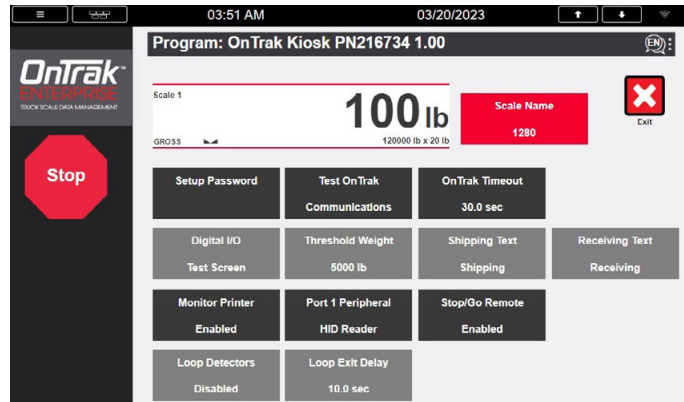


Figure 3-1. OnTrak Enterprise

Parameter	Default	Touch Icon	Description
System Password	""	Setup Password	Changes the password required for entry into the Setup Menu. Setting the password as nothing deactivates the prompt for a password when Setup is selected.
Scale Name	Please Select	Scale Name	Allows an operator to request all scale names from OnTrak Enterprise and select one from a list. This is a required field before processing a truck.
Test OnTrak Communications	-	Test OnTrak Communications	Tests communication with OnTrak Enterprise.
OnTrak Timeout	30 Seconds	OnTrak Timeout	Allows operator to modify the duration the system waits for a response from OnTrak Enterprise.
Digital IO Testing	-	Digital IO Test Screen	Turns on/off outputs and view status of inputs.
Threshold Weight	5000 lb	Threshold Weight	Allows operator to modify the minimum weight threshold to recognize a truck is on the scale.
Shipping Text	Shipping	Shipping Text	Allows operator to modify the Shipping Button text.
Receiving Text	Receiving	Receiving Text	Allows operator to modify the Receiving Button text.
Monitor Printer Status	Enabled Disabled	Monitor Printer	Allows the user to enable or disable status monitoring for the Custom America printer. When enabled, the program displays status messages relating to the printer. The program displays: <ul style="list-style-type: none"> • <i>Printer Communication Error</i> - The printer is off-line and truck processing is inhibited until printer connection is restored. • <i>Low Paper</i> - The paper receptacle is almost empty, a reprint button displays in the lower left corner until paper is refilled. • <i>Out of Paper</i> - The paper receptacle is empty, a reprint button displays in the lower left corner until paper is refilled.
Setup Serial Port 1	HID Reader SmartPass Short SmartPass Long	Port 1 Peripheral	Allows the operator to change the device connected to serial port 1. The Operator must manually change the baud rate in the 1280 configuration menu to match the baud rate settings of the connected device.
Stop/Go Remote Display	Enabled Disabled	Stop/Go Remote	Toggles on and off traffic light control to a Rice Lake Remote Display. Streaming must be configured in the 1280 configuration.
Loop Detectors	Normal Inverted Disabled	Loop Detectors	Allows the operator to configure loop detector as Inverted, Normal or Disabled. Loop Detectors are only used for zeroing the scale upon entry.
Loop Exit Delay	10.0 sec	Exit Loop Delay	Allows the operator to modify the duration loop detectors are ignored when dropping below Threshold.

Table 3-2. Device OnTrak Enterprise Parameters Descriptions

3.4 Hardware Specifications

NIT	1280 Screen Size/Type (12 in or 7 in)
1500	12 inches

Table 3-3. 1280 Screen Size/Type

Slot	Type
1	Single Channel A/D Card
2	Dual Channel Serial Card
3	Currently Unused
4	Currently Unused
5	Currently Unused
6	Currently Unused

Table 3-4. Option Card Locations

Slot	Bit	Type	Function
0	1	Output	Red Traffic Light
0	2	Output	Green Traffic Light
0	3	Programmability	Loop Detector 1 (Optional)
0	4	Programmability	Loop Detector 2 (Optional)
0	5	Output	Enable SmartPass (Optional)
0	6	Off	Currently Unused

Table 3-5. Digital I/O

Device	Port	Type	Type	Setup
Serial Ports	1	Programmability	RFID Reader / SmartPass Long Range / Smart Pass Short Range	9600 baud, 8 data bits, no parity, 1 stop bit
Serial Ports	2	Programmability	Custom America Kiosk Printer	19200 baud, 8 data bits, no parity, 1 stop bit
Serial Ports	7	CMD	Remote Display	9600 baud, 8 data bits, no parity, 1 stop bit
Serial Ports	8	CMD	Currently Not Used	9600 baud, 8 data bits, no parity, 1 stop bit
USB Device Port	3	CMD	Qwerty Keyboard (Optional)	-
USB A Port	-	CMD	Currently Not Used	-
USB A Port	-	CMD	Currently Not Used	-
Ethernet TCP/IP Port	10001	CMD	Currently Not Used	TCP Server
Ethernet TCP/IP Port	9171	CMD	Communication with OnTrak Enterprise	TCP Client 1
Ethernet TCP/IP Port	-	CMD	Currently Not Used	TCP Client 2
Ethernet TCP/IP Port	-	CMD	Currently Not Used	TCP Client 3
Ethernet TCP/IP Port	3000	CMD	Currently Not Used	Web Server
Ethernet TCP/IP Port	20000	CMD	Currently Not Used	Stream Server
SD card slot	-	CMD	8 GB microSD™ Card	Images

Table 3-6. Device Ports



© Rice Lake Weighing Systems Specifications subject to change without notice.

230 W. Coleman St. • Rice Lake, WI 54868 • USA
U.S. 800-472-6703 • Canada/Mexico 800-321-6703 • International 715-234-9171 • Europe +31 (0)26 472 1319